


PRODUCT DATA SHEET

Stop bead for dry lining
12,5 mm PB, Steel Aluzinc
Item no. 10883



Status: 01.08.2026 | 09:33

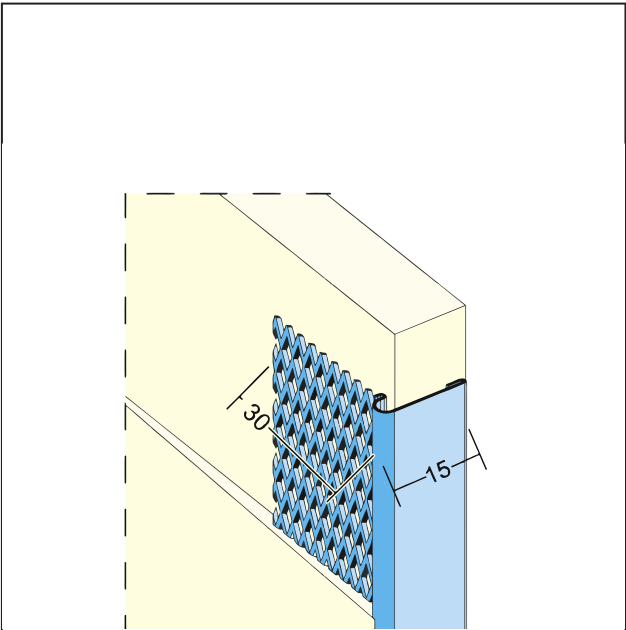

Designation	Stop bead for dry lining 12,5 mm PB, Steel Aluzinc
Description	Stop bead made of sheet steel with aluzinc coating, 12.5 mm, for filling in drywall construction.
Product area	Interior finishing
Product category	Filler profiles
Plaster thickness	2 mm
GK/Plate	12,5 mm
Material thickness	0,33 mm
Standard EN	EN 14353
Galvanizing	AZ 150
Reaction to fire (R2F)	A1
Customs tariff number	72166110
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
115337	305.00	2 mm	Steel, aluzinc	50 PCS / 65 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!