



PRODUCT DATA SHEET

Picture profile for dry lining
12,5 mm PB
Item no. 1118

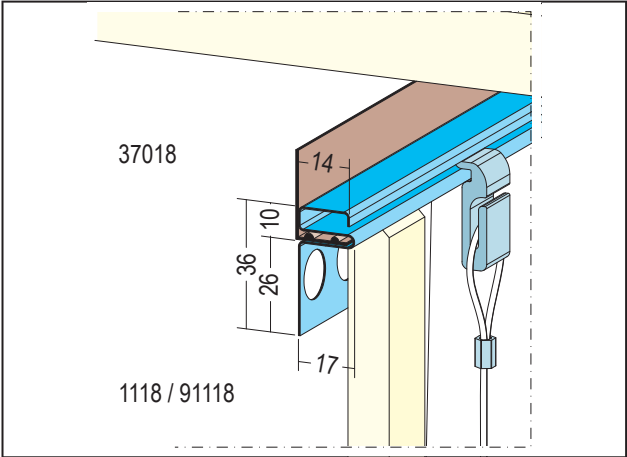

Status: 01.08.2026 | 09:21

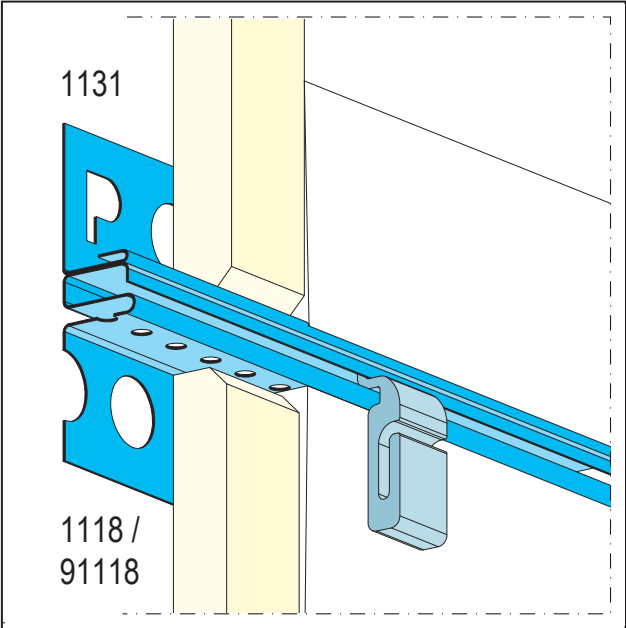

Designation	Picture profile for dry lining 12,5 mm PB
Description	Picture rail made of galvanised sheet steel for 12.5 mm plasterboard. When installing in wall surfaces, also install stop bead 1131 to prevent movement cracks. Do not fill the picture rail up to the front bar; leave approx. 3 mm to prevent damage when pushing the hook. For purely static loads only. Max. load: 0.15 kN/running metre. Not suitable for multimedia devices.
Product area	Interior finishing
Product category	Design profiles
Plaster thickness	1 mm
GK/Plate	12,5 mm
Customs tariff number	72169180
Processing instructions	To prevent movement cracks in wall surfaces, also use stop bead 1131. Do not fill the picture rail up to the front bar; leave approx. 3 mm to prevent damage caused by pushing the hook.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
101006	250.00	1 mm	Galvanised steel	15 PCS / 95 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!