

PRODUCT DATA SHEET



Stop bead for dry lining

12,5 mm PB

Item no. 1131



Status: 01.08.2026 | 09:11

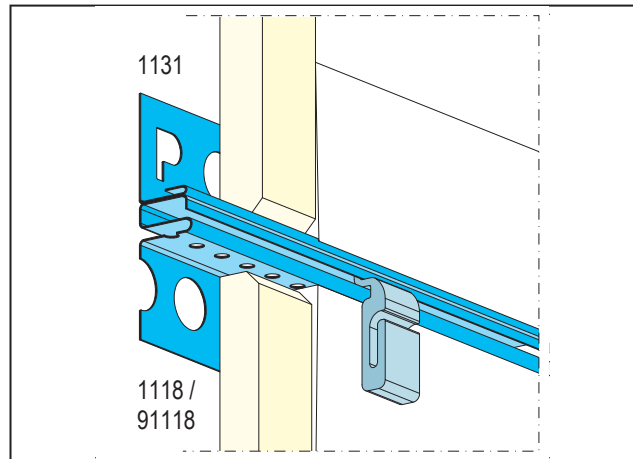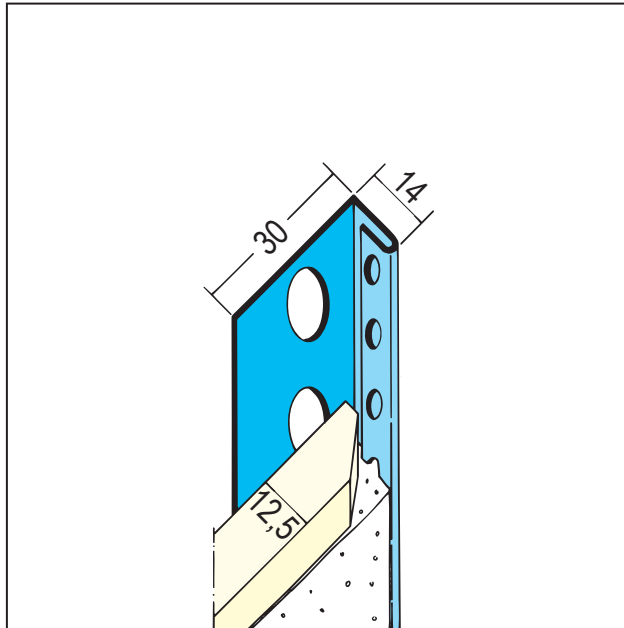

Designation	Stop bead for dry lining 12,5 mm PB
Description	The PROTEKTOR stop bead with trowel holes is suitable for 12.5 mm plasterboard.
Product area	Interior finishing
Product category	Filler profiles Design profiles
Types of mortar	Silicate plaster, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster
Plaster thickness	1 mm
GK/Plate	12,5 mm
Standard EN	EN 14353
Galvanizing	Z 275
Reaction to fire (R2F)	A1
Customs tariff number	72169180
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
100684	250.00	1 mm	Galvanised steel	25 PCS / 90 BUN
100698	300.00	1 mm	Galvanised steel	25 PCS / 80 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!