


PRODUCT DATA SHEET

Stop bead for dry lining
15 mm PB
Item no. 11321



Status: 01.08.2026 | 09:10

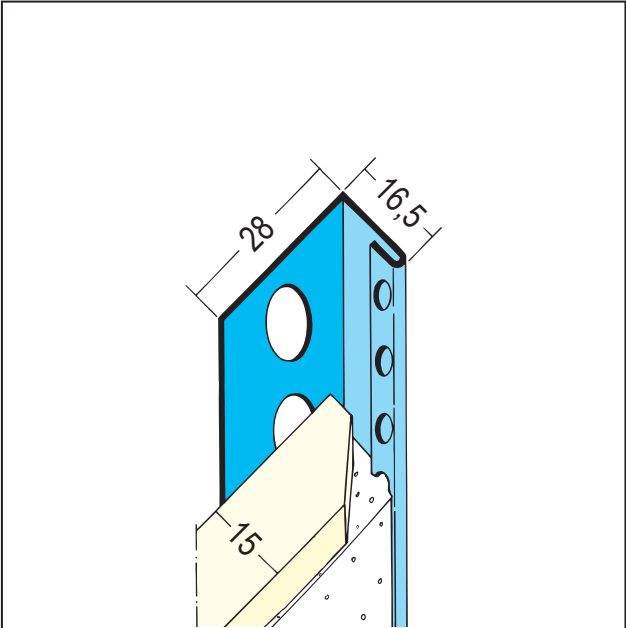

Designation	Stop bead for dry lining 15 mm PB
Description	Abschlussprofil mit Spachtellochung für Gipskartonplatten 15 mm.
Product area	Interior finishing
Product category	Filler profiles
Types of mortar	Silicate plaster, Reinforcing plaster organ, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster, Clay plaster
Plaster thickness	1 mm
GK/Plate	15 mm
Standard EN	EN 14353
Reaction to fire (R2F)	E
Customs tariff number	72169180
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
107529	300.00	1 mm	Galvanised steel, with white basic coating	10 - white	25 PCS / 80 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!