

PRODUCT DATA SHEET


Wire corner bead for interior and exterior plaster (APR)

15 mm

Item no. 11602



Status: 02.08.2026 | 21:05

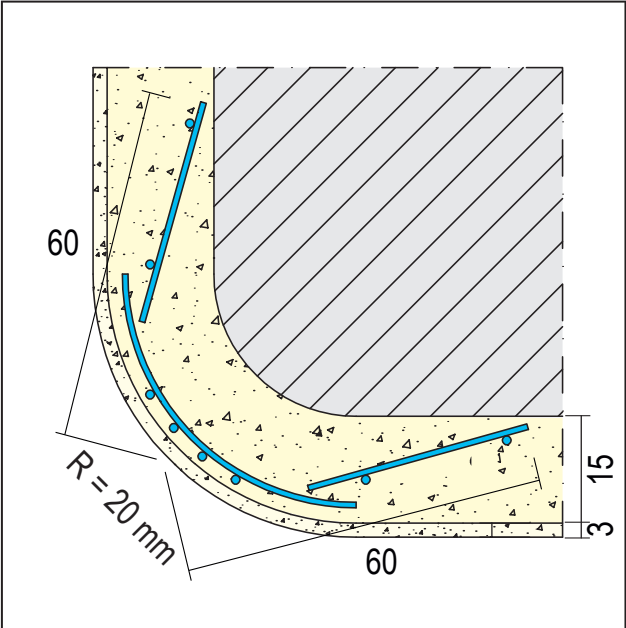

Designation	Wire corner bead for interior and exterior plaster (APR) 15 mm
Description	Windra® APR wire corner bead made of galvanised steel, for rounded edges in interior and exterior plaster from 15 mm. Particularly suitable for coarse plaster or special requirements for plaster adhesion.
Product area	Interior plaster Exterior plaster
Product category	Corner profiles
Plaster thickness	15 mm
Standard EN	EN 13658-2
Galvanizing	200 g/m²
Leg length	60 x 60 mm
Rounding off radius	20 mm
Reaction to fire (R2F)	A1
Customs tariff number	73262000
Processing instructions	Galvanised profile edges in outdoor areas must be covered with at least 3 mm of mineral finishing plaster.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
142946	295.00	15 mm	Galvanised steel	40 PCS / 20 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!