



PRODUCT DATA SHEET

Wire corner bead for interior and exterior plaster (APKS)
from 15 mm
Item no. 11622

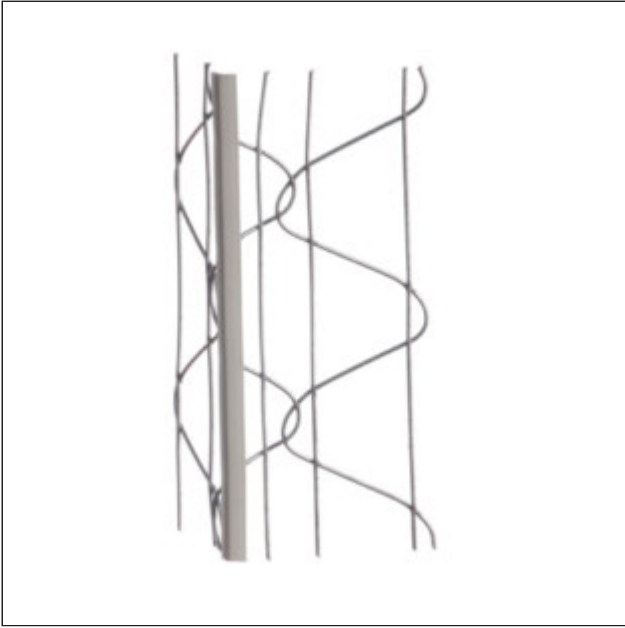

Status: 02.08.2026 | 20:59

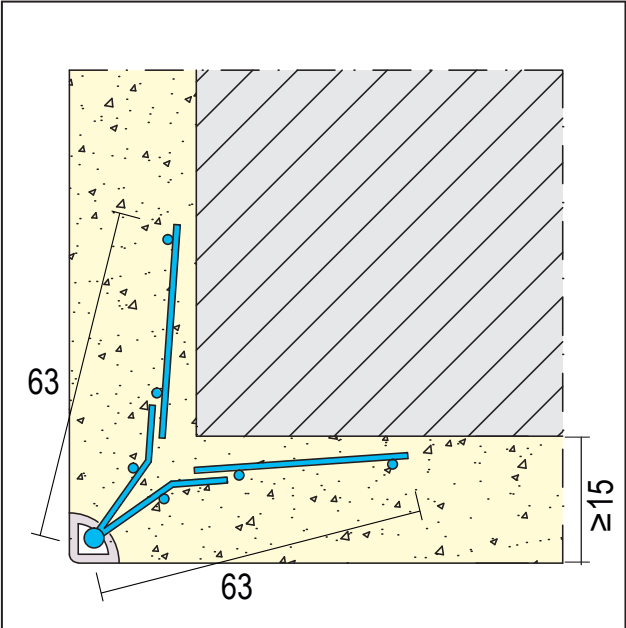

Designation	Wire corner bead for interior and exterior plaster (APKS) from 15 mm
Description	Widra® APKS wire corner bead made of galvanised steel with PVC edge, for interior and exterior plaster from 15 mm. The use of only two longitudinal wires makes it particularly suitable for coarse plasters or special requirements for plaster bonding.
Product area	Interior plaster Exterior plaster
Product category	Corner profiles
Types of mortar	Silicate plaster, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster
Plaster thickness	15 mm
Standard EN	EN 13658-2
Galvanizing	200 g/m²
Leg length	63 x 63 mm
Application Areas	Particularly suitable for scratch coats.
Reaction to fire (R2F)	E
Treatment	Galvanised profiles with smooth PVC edges must not be plastered over in the edge area.
Customs tariff number	73262000
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
142894	295.00	15 mm	Galvanised steel, with PVC coating	10 - white	25 PCS / 30 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!