


PRODUCT DATA SHEET

Stop bead for dry lining
12,5 mm PB
Item no. 1234



Status: 01.08.2026 | 08:40

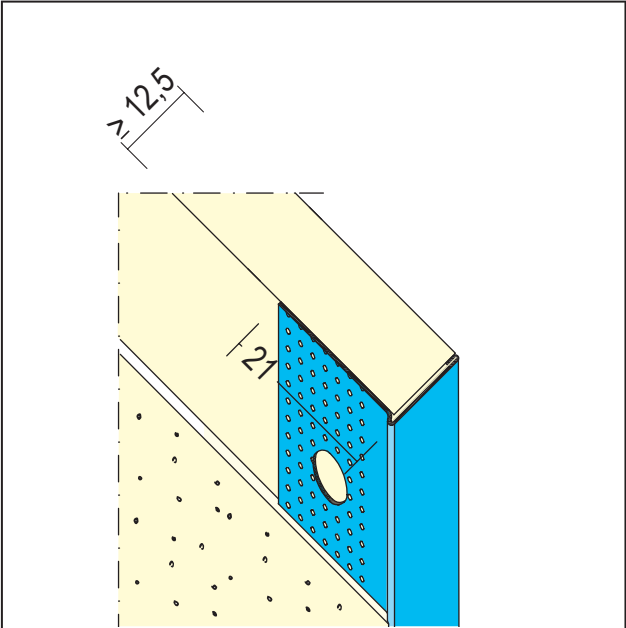

Designation	Stop bead for dry lining 12,5 mm PB
Description	“Göppinger” profile made of galvanised steel for creating single edges at plastered junctions, e.g. sliding ceiling and wall connections, for plasterboard sheets of 12.5 mm and thicker.
Product area	Interior finishing
Product category	Filler profiles
Types of mortar	Silicate plaster, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster
Plaster thickness	1 mm
GK/Plate	12,5 mm
Standard EN	EN 14353
Reaction to fire (R2F)	A1
Leaflet	* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., www.gips.de
Customs tariff number	72169180
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
102712	300.00	1 mm	Galvanised steel	20 PCS / 210 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!