

PRODUCT DATA SHEET



Plain bearing joint profile for exterior plaster

14 mm

Item no. 1240



Status: 01.08.2026 | 08:37

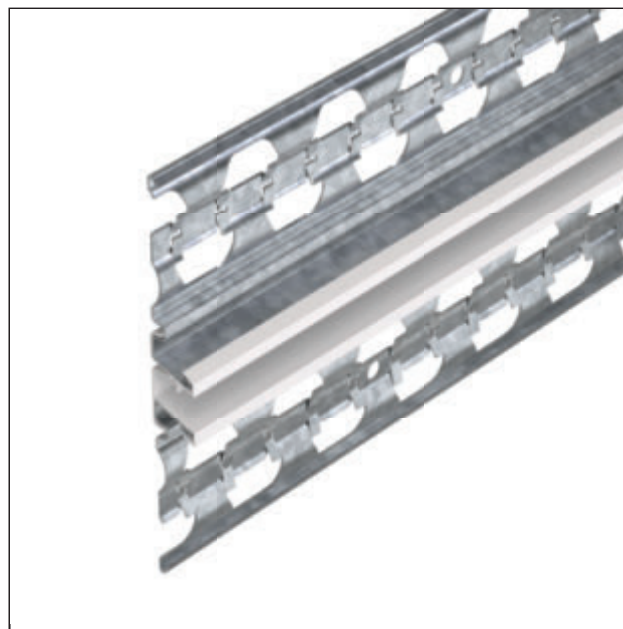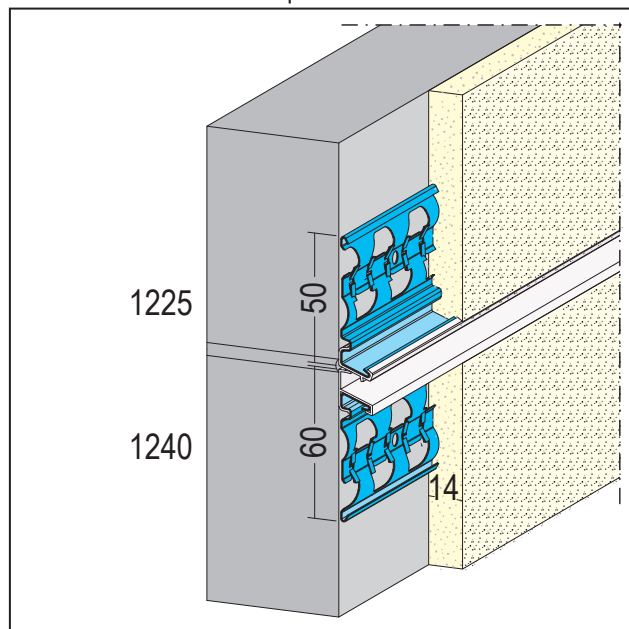

Designation	Plain bearing joint profile for exterior plaster 14 mm
Description	PROTEKTOR plain bearing joint profile made of galvanised steel, with PVC coating, for interior and exterior plaster from 14 mm. It is a profile combination for transferring ceiling sliding bearings into the plaster surface. The PVC coating protects against abrasion and corrosion. The plain bearing joint profile consists of the upper part, drip bead 1225, and the lower part, 1240.
Product area	Exterior plaster
Product category	Joint profiles
Types of mortar	Silicate plaster, Insulating plaster, Deposits cleaning, Lime plaster, Lime cement plaster
Plaster thickness	14 mm
Standard EN	EN 13658-2
Reaction to fire (R2F)	E
Treatment	Fix upper edges of profiles 1240 at the level of the sliding joint. Profile joints to be staggered by 60 cm. For connection, push PVC cover strip up to 10 mm over edging points with a permanent elastic material. Do not render over PVC cover strips of profiles 1240 – danger of humidity penetration. Profile joints and connections to expansion beads must be installed correctly and in accordance with the specific load conditions. In outdoor areas and in areas subject to moisture, the client must ensure proper waterproofing, e.g. using suitable, system-compatible sealants or by installing pre-compressed sealing tapes. The relevant specifications and installation instructions provided by the manufacturers of the sealants or sealing tapes used must be observed. The product-specific areas of application and installation instructions for the profile must also be taken into account.
Leaflet	* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., www.gips.de
Customs tariff number	73269060
Processing instructions	1. Fix upper edges of profiles 1240 at the level of the sliding joint. 2. Profile joints to be staggered by 60 cm. 3. For connection, push PVC cover strip up to 10 mm over edging points with a permanent elastic material. 4. Do not render over PVC cover strips of profiles 1240 – danger of humidity penetration.
Opened label	Purchase only possible as full packaging units.

PRODUCT DATA SHEET

Plain bearing joint profile for exterior plaster

14 mm

Item no. 1240



Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
107608	300.00	14 mm	Galvanised steel, with PVC coating	10 - white	25 PCS / 40 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!