

PRODUCT DATA SHEET



Stop bead for thermal insulation plaster

30 mm

Item no. 1283



Status: 01.08.2026 | 08:27

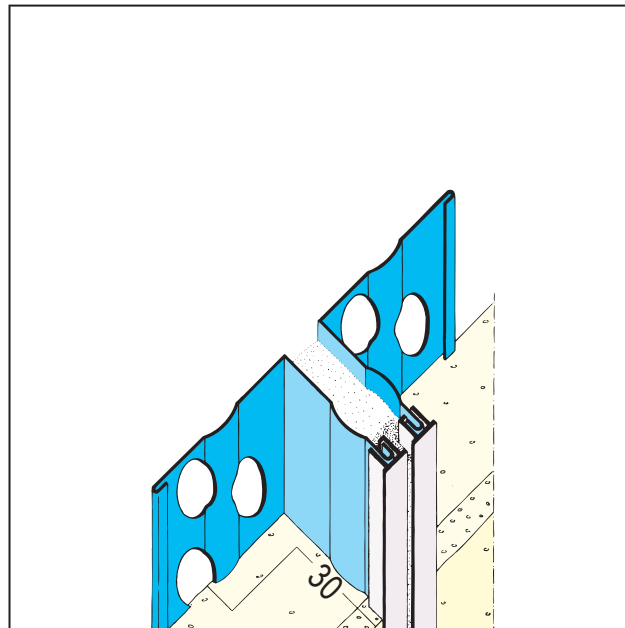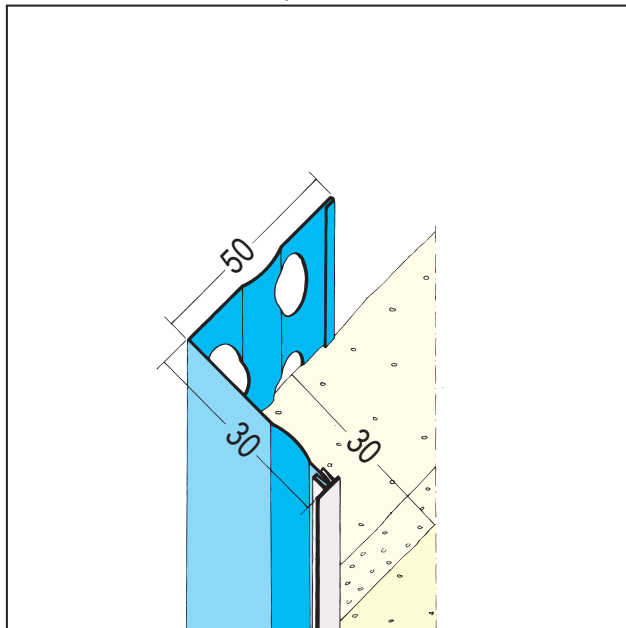

Designation	Stop bead for thermal insulation plaster 30 mm
Description	Render stops made of galvanised steel with PVC coating for thermal insulation plaster. Ideally suited for installing in pairs to create movement joints. Visible joints are closed using a backfill profile and permanent flexible material at the front. Only to be installed vertically on damp or wet surfaces. Centre can only plastered over in certain cases.
Product area	Interior plaster Exterior plaster Thermal insulation
Product category	Plaster/render stops Corner profiles Profiles for insulating plaster
Types of mortar	Silicate plaster, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster
Plaster thickness	30 mm
Standard EN	EN 13658-2
Revision	Ideally suited for creating movement joints. Visible joints are closed using a backfill profile and permanent flexible material at the front. Work on visible PVC surfaces is limited and only when suitable coatings are applied. Approval is required from the coating material manufacturer.
Reaction to fire (R2F)	E
Customs tariff number	72169180
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
101019	300.00	30 mm	Galvanised steel, with PVC coating	10 - white	15 PCS / 55 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

PRODUCT DATA SHEET

Stop bead for thermal insulation plaster

30 mm

Item no. 1283



All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!