


# PRODUCT DATA SHEET

Featured bead with shadow gap for dry lining  
15 mm PB  
Item no. 1328



Status: 01.08.2026 | 04:46

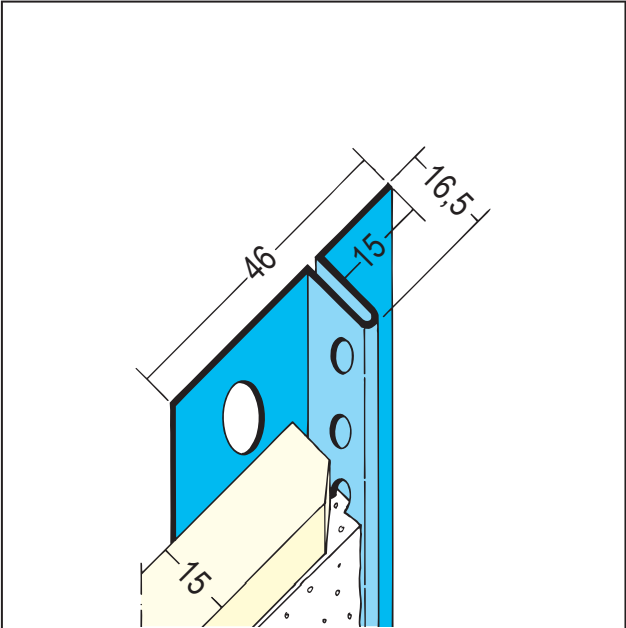

|                        |                                                                                                                                                                                                                   |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Designation            | Featured bead with shadow gap for dry lining 15 mm PB                                                                                                                                                             |
| Description            | Galvanised steel stop bead for installation under plasterboard, with 15 mm shadow gap. For creating single-sided finished edges, e.g. in the area of sliding ceiling or wall connections, for 15 mm plasterboard. |
| Product area           | Interior finishing                                                                                                                                                                                                |
| Product category       | Design profiles                                                                                                                                                                                                   |
| Plaster thickness      | 1 mm                                                                                                                                                                                                              |
| GK/Plate               | 15 mm                                                                                                                                                                                                             |
| Standard EN            | EN 14353                                                                                                                                                                                                          |
| Standard               | EN 13658-1                                                                                                                                                                                                        |
| Reaction to fire (R2F) | A1                                                                                                                                                                                                                |
| Shadow gap             | 15 mm                                                                                                                                                                                                             |
| Customs tariff number  | 72169180                                                                                                                                                                                                          |
| Opened label           | Purchase only possible as full packaging units.                                                                                                                                                                   |

| Item number | Length (cm) | Plaster thickness | Material         | Packaging unit  |
|-------------|-------------|-------------------|------------------|-----------------|
| 101312      | 300.00      | 1 mm              | Galvanised steel | 15 PCS / 76 BUN |

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!