


PRODUCT DATA SHEET

Featured bead with shadow gap for dry lining
12,5 mm PB
Item no. 1371



Status: 01.08.2026 | 04:45

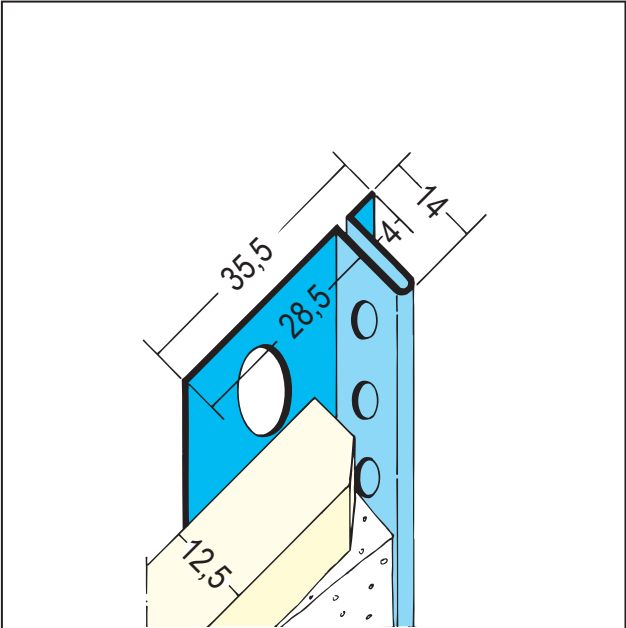

Designation	Featured bead with shadow gap for dry lining 12,5 mm PB
Description	PROTEKTOR stop bead made of galvanised steel, suitable for installation under plasterboard, with a 4 mm shadow gap. For creating single-sided finished edges, e.g. in the area of sliding ceiling or wall connections, for 12.5 mm plasterboard.
Product area	Interior finishing
Product category	Design profiles
Plaster thickness	1 mm
GK/Plate	12,5 mm
Standard EN	EN 14353
Standard	EN 13658-1
Reaction to fire (R2F)	A1
Shadow gap	4 mm
Customs tariff number	72169180
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
101354	250.00	1 mm	Galvanised steel	15 PCS / 128 BUN
101370	300.00	1 mm	Galvanised steel	15 PCS / 112 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!