

PRODUCT DATA SHEET


Featured bead with shadow gap for dry lining

20 mm PB

Item no. 1375



Status: 01.08.2026 | 04:40

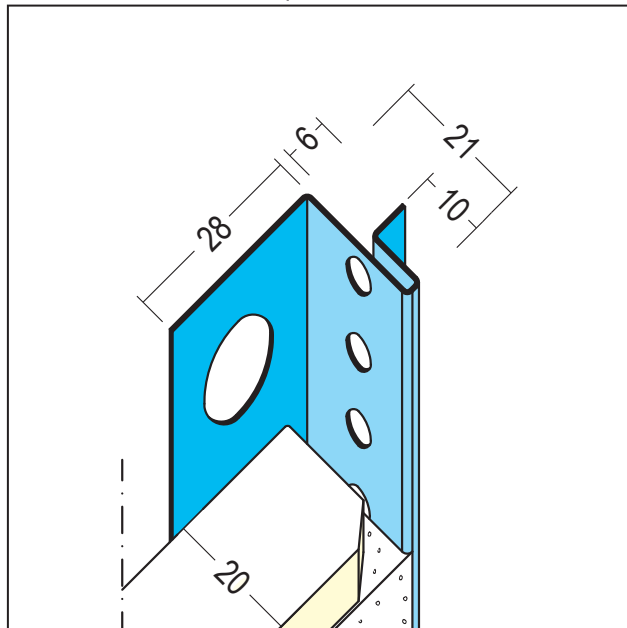

Designation	Featured bead with shadow gap for dry lining 20 mm PB
Description	PROTEKTOR stop bead made of galvanised steel for installation under plasterboard with a 6 mm shadow gap. For creating single-sided filled ends, e.g. in the area of sliding ceiling or wall connections, for 20 mm plasterboard.
Product area	Interior finishing
Product category	Design profiles
Plaster thickness	1 mm
GK/Plate	20 mm
Standard EN	EN 14353
Standard	EN 13658-1
Reaction to fire (R2F)	A1
Leaflet	* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., www.gips.de
Shadow gap	6 mm
Customs tariff number	72169180
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
108513	300.00	1 mm	Galvanised steel	10 PCS / 144 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!