

PRODUCT DATA SHEET



lath for thermal insulation plaster

234 x 100 x 3 cm

Item no. 1432



Status: 02.08.2026 | 04:46

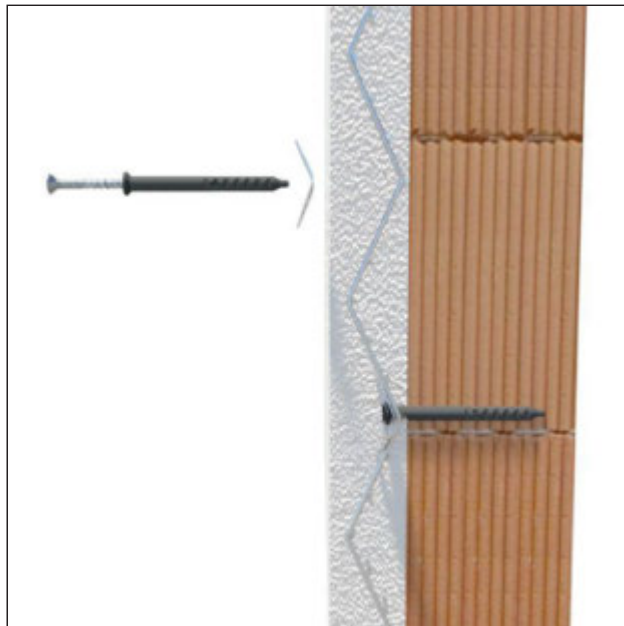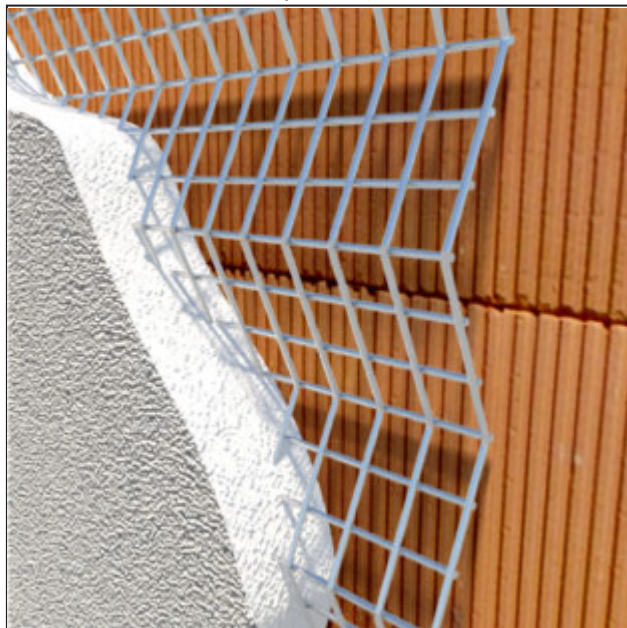

Designation	lath for thermal insulation plaster 234 x 100 x 3 cm
Description	Insulating plaster base mat made of welded, galvanised wire mesh, for interior and exterior insulating plaster from 30 mm. Particularly suitable as plaster reinforcement on various substrates to prevent cracking.
Product area	Interior plaster Exterior plaster
Product category	Plaster base
Types of mortar	Insulating plaster, Inlay plaster
Plaster thickness	50 mm
Material thickness	1 mm
Galvanizing	> 300 g/m ²
Product width	1000 mm
Product height in mm	30 mm
Mesh size	19 x 19 mm
Application Areas	Insulating plaster base mat for mineral plasters and insulating plasters in interior and exterior areas from 30 mm. Particularly suitable as plaster reinforcement on various substrates to prevent cracking.
Underground	For substrates without sufficient adhesion.
Treatment	To be fixed with dowels with retaining plate 1433 (60 mm) or 1434 (80 mm). Anchoring is carried out with at least 9 pieces/m ² . The insulation plaster base mat requires a minimum plaster overlap of 20 mm. For horizontal installation, an overlap of at least 10 cm is required at the panel ends. For vertical installation, an overlap of at least one board wave is required. Cut to length only with standard sheet metal shears.
Leaflet	* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., www.gips.de
Customs tariff number	73143100
Opened label	Purchase only possible as full packaging units.

PRODUCT DATA SHEET

lath for thermal insulation plaster

234 x 100 x 3 cm

Item no. 1432



Item number	Length (cm)	Plaster thickness	Material	Packaging unit
116499	234.00	50 mm	Galvanised steel	20 PCE / 20 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!