

PRODUCT DATA SHEET


Featured bead with shadow gap for dry lining

12,5 mm PB

Item no. 1750



Status: 01.08.2026 | 04:31

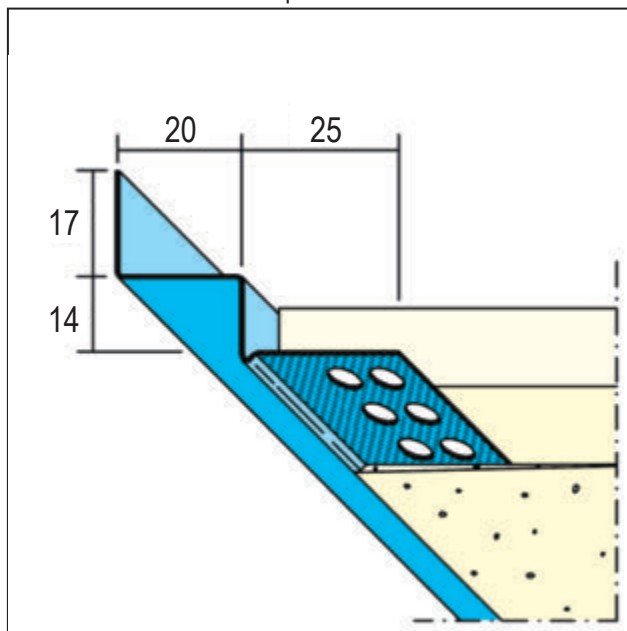

Designation	Featured bead with shadow gap for dry lining 12,5 mm PB
Description	Galvanised steel render stop with 20-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.
Product area	Interior finishing
Product category	Design profiles
Plaster thickness	1 mm
GK/Plate	12,5 mm
Standard EN	EN 14353
Reaction to fire (R2F)	A1
Leaflet	* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., www.gips.de
Shadow gap	20 mm
Customs tariff number	72169180
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
106753	300.00	1 mm	Galvanised steel	20 PCS / 72 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!