

# PRODUCT DATA SHEET


Connecting profile for dry lining

12,5 mm PB

Item no. 2241



Status: 11.04.2024 | 03:04

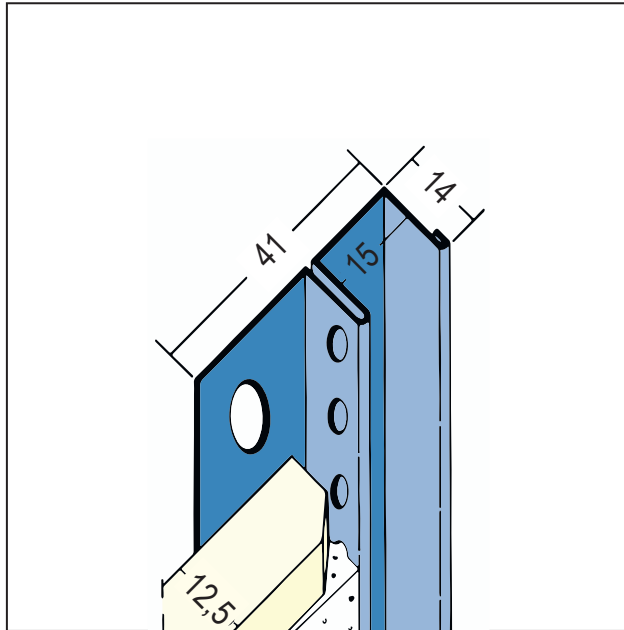

<b>Designation</b>	Connecting profile for dry lining 12,5 mm PB
<b>Description</b>	PROTEKTOR Stainless steel connection profile with filler perforations and 15 mm formed shadow joint for 12.5-mm plasterboard panels.
<b>Product area</b>	Wet rooms   Internal construction
<b>Product category</b>	Wet rooms to W3-I   Design profiles
<b>Types of mortar</b>	Silicate plaster, Reinforcing plaster organ, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster, Clay plaster, Restoration plaster
<b>Plaster thickness</b>	14 mm
<b>Material</b>	Stainless steel
<b>GK/Plate</b>	12,5 mm
<b>Standard EN</b>	EN 13658-1
<b>Product length</b>	250 cm
<b>Application Areas</b>	For wet rooms with water exposure class up to W3-I.
<b>Reaction to fire (R2F)</b>	A1
<b>Packaging Unit</b>	15 PCS / 108 BUN
<b>Leaflet</b>	* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, <a href="http://www.europrofiles.com">www.europrofiles.com</a> , * Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, <a href="http://www.europrofiles.com">www.europrofiles.com</a> , * Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., <a href="http://www.gips.de">www.gips.de</a>
<b>Shadow gap</b>	15 mm

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

# PRODUCT DATA SHEET

Connecting profile for dry lining

12,5 mm PB

Item no. 2241



All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!