


PRODUCT DATA SHEET

Featured bead with shadow gap for dry lining
12,5 mm PB
Item no. 2263



Status: 01.08.2026 | 03:57

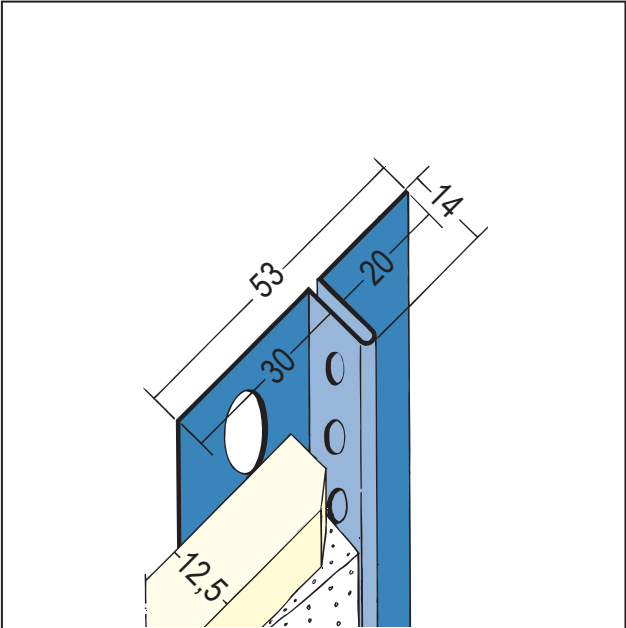

Designation	Featured bead with shadow gap for dry lining 12,5 mm PB
Description	The PROTEKTOR stainless steel featured bead with filling holes and moulded shadow gap 20 mm is suitable for 12.5 mm plasterboard (e.g. on timber frames, half-timbered structures, etc. in various widths).
Product area	Wet rooms Interior finishing
Product category	Wet rooms to W3-I Design profiles
Types of mortar	Silicate plaster, Reinforcing plaster organ, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster, Clay plaster, Restoration plaster
Plaster thickness	14 mm
GK/Plate	12,5 mm
Standard EN	EN 13658-1
Application Areas	For wet rooms with water exposure class up to W3-I.
Reaction to fire (R2F)	A1
Treatment	Do not set the profile too deep in the groove when creating connections, e.g. to wooden block frames, and maintain a distance of 2-3 mm.
Leaflet	* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., www.gips.de
Shadow gap	20 mm
Customs tariff number	72224090
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
101386	250.00	14 mm	Stainless steel	15 PCS / 69 BUN

PRODUCT DATA SHEET

Featured bead with shadow gap for dry lining

12,5 mm PB

Item no. 2263



This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!