


# PRODUCT DATA SHEET

Expansion joint bead for thermal insulation  
6 mm, surface/corner  
Item no. 31533



Status: 02.08.2026 | 09:23

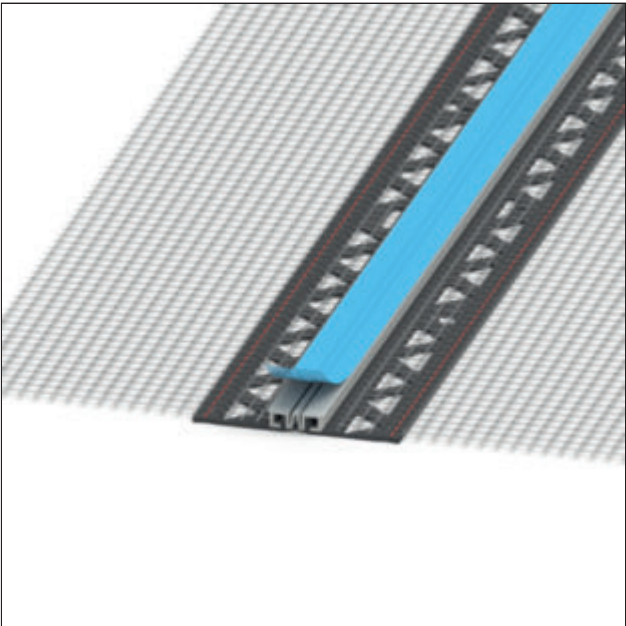

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Designation                    | Expansion joint bead for thermal insulation 6 mm, surface/corner                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description                    | PROTEKTOR expansion bead with centre section made of hard PVC and soft PVC with alkali-resistant glass fibre fabric for interior and exterior plaster, for use on flat surfaces and in interior corners. For outdoor use and in damp rooms, only for vertical use. The PVC centre section can only be coated with suitable coatings to a limited extent. Approval from the coating manufacturer is required.                                                                                                                                                                                               |
| Product area                   | Thermal insulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Product category               | Joint profiles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Plaster thickness              | 6 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Revision                       | The PVC centre section can only be recoated to a limited extent with suitable coatings. The approval of the coating manufacturer is required.                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Motion recording train / print | +4/-2 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Grammage                       | 160 g/m²                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Mesh size                      | 4 x 4 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Density                        | Dichtigkeit muss bauseits erfolgen.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Treatment                      | Profile joints and connections to expansion beads must be installed correctly and in accordance with the specific load conditions. In outdoor areas and in areas subject to moisture, the client must ensure proper waterproofing, e.g. using suitable, system-compatible sealants or by installing pre-compressed sealing tapes. The relevant specifications and installation instructions provided by the manufacturers of the sealants or sealing tapes used must be observed. The product-specific areas of application and installation instructions for the profile must also be taken into account. |
| Overplastering Ability         | Centre section white, plaster legs grey                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Annotation                     | Centre section white, plaster legs grey                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Customs tariff number          | 39259080                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Opened label                   | Purchase only possible as full packaging units.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

| Item number | Length (cm) | Plaster thickness | Material                                     | Colour             | Packaging unit  |
|-------------|-------------|-------------------|----------------------------------------------|--------------------|-----------------|
| 120141      | 260.00      | 6 mm              | Rigid PVC with soft PVC and glass fibre mesh | BF - traffic white | 10 PCS / 13 BOX |

# PRODUCT DATA SHEET

Expansion joint bead for thermal insulation

6 mm, surface/corner

Item no. 31533



This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!