

PRODUCT DATA SHEET



Frameseal bead with shadow gap

9 mm

Item no. 37104



Status: 01.08.2026 | 00:31

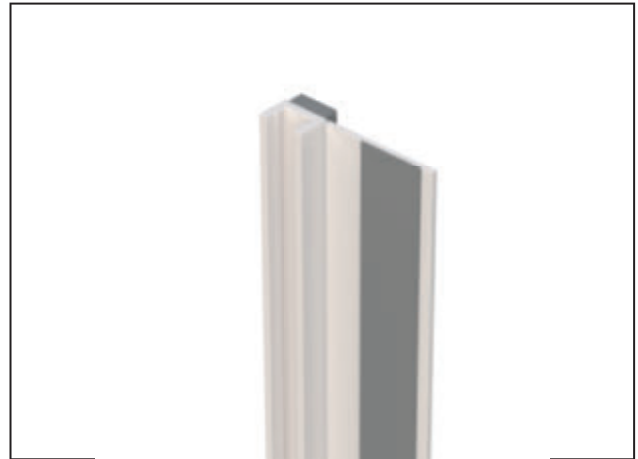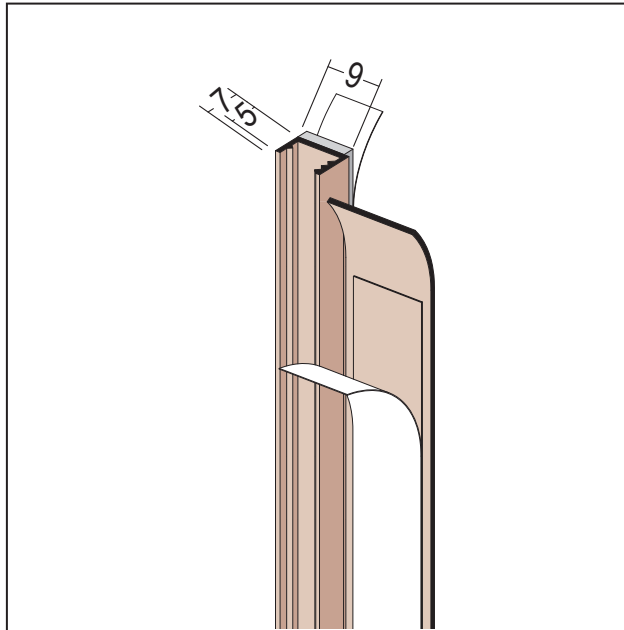

Designation	Frameseal bead with shadow gap 9 mm
Description	The self-adhesive PROTEKTOR PVC plastering strip with shadow gap and tear-off adhesive tab for foil covering is suitable for creating visually and technically flawless connections between windows, doors and other components and plaster. Profile width 9 mm for interior and exterior plaster.
Product area	Interior plaster Exterior plaster
Product category	Soffit profiles
Plaster thickness	9 mm
Product width	9 mm
Air and component temperature	+5° bis +40°C
	2 mm
	8 mm
Reaction to fire (R2F)	E
Appearance	Self-adhesive, closed-cell foam tape.
Underground	Adhesive areas must be flat, dry (note possible condensation), free of frost, dust and grease, and firm and stable. An adhesive test will determine whether the substrate is suitable for adhesion or whether special measures (e.g. cleaning) are required.
Treatment	Maximum installation length of 260 cm due to possible linear expansion. For underground with lightness value greater than 20.
Storage	Store profiles dry, frost-free, horizontally and flat in the box. Do not store or transport profiles which are twisted or bent. Protect cartons and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the carton over its entire length.
Impermeability to driving rain	bis 1050 Pa
Movement according to VDPM leaflet/SAF guideline	Klasse D
product line	Standard
Test report	Geprüfte Luft-, Wind- und Schlagregendichtheit. Die jeweils aktuellen Prüfberichte stehen auf www.protektor.de zum Download bereit.

PRODUCT DATA SHEET

Frameseal bead with shadow gap

9 mm

Item no. 37104



Leaflet

* Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM).

* Guideline for connections to windows and shutters in plaster, thermal insulation composite system and dry construction, published by the Baden-Württemberg Association of Plasterers for Interiors and Facades (SAF).

Shadow gap	2 mm
Airtightness	bis 600 Pa
Customs tariff number	39162000
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
112384	260.00	9 mm	Hard PVC	10 - white	60 PCS / 36 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!