

PRODUCT DATA SHEET


Frameseal bead with shadow gap

10 mm

Item no. 3711



Status: 02.08.2026 | 00:42

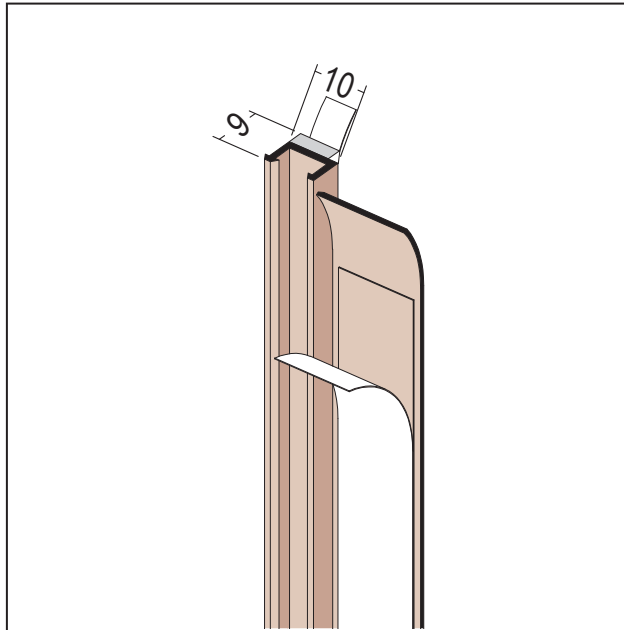

Designation	Frameseal bead with shadow gap 10 mm
Description	Self-adhesive PROTEKTOR PVC plastering strip with shadow gap and tear-off adhesive tab for foil covering, suitable for creating visually and technically flawless connections between windows, doors and other components and plaster. Profile width 10 mm for interior and exterior plaster.
Product area	Interior plaster Exterior plaster
Product category	Soffit profiles
Plaster thickness	10 mm
Product width	10 mm
	3 mm
	8 mm
Appearance	Self-adhesive, closed-cell foam tape.
Underground	Adhesive areas must be flat, dry (note possible condensation), free of frost, dust and grease, and firm and stable. An adhesive test will determine whether the substrate is suitable for adhesion or whether special measures (e.g. cleaning) are required.
Treatment	Pull off the liner of the foam tape approx. 10 -15 cm, then place the profile in the desired position, then gradually fix the cover strip under the profile by pressing it on. Plastering strips without plastering legs must generally not be extended by butting in the exterior area. Air pockets and cavities behind the profiles are not permitted and reduce the force-fit embedding. Do not plaster or paint over the PVC bar that remains visible. Maximum window height outdoors 2.6 m. Can be used on substrates with a lightness value greater than 20. Please observe the PROTEKTOR selection criteria, processing instructions and installation recommendations.
Storage	Store profiles dry, frost-free, horizontally and flat in the box. Do not store or transport profiles twisted or bent. Protect cartons and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the carton over its entire length.
Impermeability to driving rain	bis 1050 Pa
Movement according to ÖNORM B6400/ÖAP VAR VII	Class IC
product line	Standard
Test report	Tested air, wind and driving rain tightness, tested movement absorption. The current test reports are available for download at www.protektor.de .

PRODUCT DATA SHEET

Frameseal bead with shadow gap
10 mm
Item no. 3711



Leaflet	* Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM). * Instruction sheet for association guidelines on connections to windows and shutters for plaster, thermal insulation composite systems and dry construction, published by the Association of Plasterers for Interiors and Facades. * Guideline for connections to windows and shutters in plaster, thermal insulation composite system and dry construction, published by the Baden-Württemberg Association of Plasterers for Interiors and Facades (SAF).
Customs tariff number	39162000
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
117814	260.00	10 mm	Rigid PVC with soft PVC	10 - white	60 PCS / 36 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!