


# PRODUCT DATA SHEET

Composite bead WET-FLEX 100 for corners in dry lining  
Water activatable, self-adhesive, roll  
Item no. 37320



Status: 01.08.2026 | 17:20

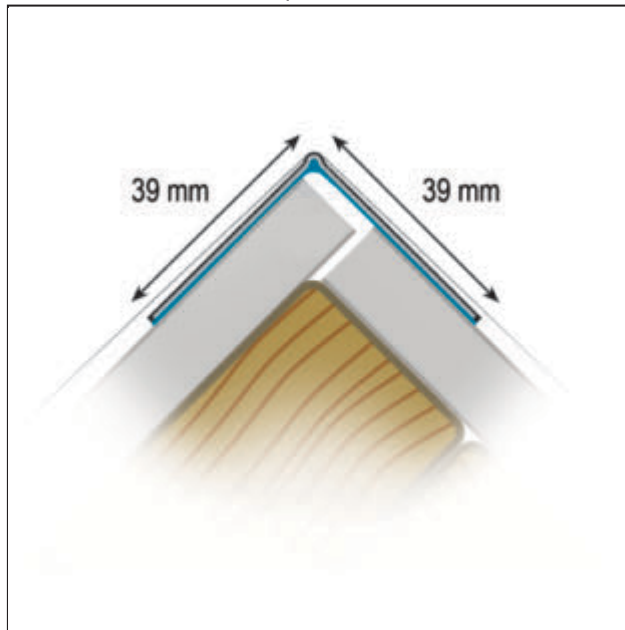

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Designation</b>        | Composite bead WET-FLEX 100 for corners in dry lining Water activatable, self-adhesive, roll                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Description</b>        | <p>Flexible, self-sticking composite profile from the roll with a water-activatable adhesive side. It's suitable for inside and outside edges in every angle positions. The profile will get the desired angular position by creasing on the reset-free Superflex joint splint. The roll material in a handy packaging allows an individual adjustment of the strip to the necessary size and thus reduces waste and costs.</p> <p>The adhesive side becomes active by spraying with water. The profiles can be mounted thus quickly, precisely and easily and can be reworked further 5 to 10 minutes. Inaccurate cut edges or offset joints can be concealed and don't have to be covered up separately. Excellent adhesion of the filler as a result of the completely fibre-coated surface.</p> <p>For the use on gypsum plasterboards in the drywall construction, for the production of straight and precise inside and outside edges. The PVC core provides exceptional edge strength and durability, even in high traffic and busy areas.</p> |
| <b>Product area</b>       | Interior finishing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Product category</b>   | Filler profiles   Composite profiles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Plaster thickness</b>  | 1 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Material thickness</b> | 0,8 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Product width</b>      | 78 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Revision</b>           | Reworkable with a suitable filling compound, ca. 5 to 10 minutes after the bonding. Putty the composite to the head of the profile.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Leg length</b>         | 39 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Application Areas</b>  | For the use on gypsum plasterboards in the drywall construction, for the production of straight and precise inside and outside edges. The PVC core provides exceptional edge strength and durability, even in high traffic and busy areas.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Underground</b>        | The underground has to be sustainable, solid, clean and dry. ATTENTION! Only use the profiles on clean and unprimed gypsum boards.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

# PRODUCT DATA SHEET

Composite bead WET-FLEX 100 for corners in dry lining  
Water activatable, self-adhesive, roll  
Item no. 37320



|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Treatment</b>              | 1. Cut the composite to length and put it in the right angle by folding, for example with the folding tool Flex-Folder 1479, cut the profile corner in a 45° angle. 2. Constantly spraying on the standing profiles with a suitable pump spray bottle on the adhesive side (blue) with water. Activation time ca. 45 sec, after that the active time of the glue is ca. 1 minute depending on the room climate. 3. Setting the profile with the printed side outwards on. Fixing with the hands or with suitable tools, for example the outside edge roller WSR 1474, under constant pressure. 4. After sufficient drying (depending on the weather, ca. 5 to 10 min) putty it completely with a suitable filling compound. After the drying of the filling compound, the edge can be grinded. 5. With that, the treatment of the composite is finished. Depending on the required surface quality (Q3-Q4), additional filler plies can be necessary. Please notice the technical datasheet of the used filling compound. Don't use under +5°C air-, object- and drying temperature. |
| <b>Consumption</b>            | The rolled products can be cut on the individual length of the edge on the object and reduce by this waste and costs. The consumption of filling compound depends on the structure of the surface and the absorbency of the underground as well as the qualities of the filling compound. Compared to conventional filler profiles, the material input becomes reduced.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Tool</b>                   | For the efficient adjustment of the profile edge, the Flex-Folder 1479 is recommended. For ensuring an optimal contact pressure, use the outside edge roller WSR 1474.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Treatment Temperature</b>  | Do not perform the application at air, object or drying temperatures below +5°C.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Overplastering Ability</b> | Notice the additional treatment notes and the datasheets of the used filling compound.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Storage</b>                | Store it cold, dry and protected from moisture.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Storage life</b>           | Can be stored for 18 months.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Disposal</b>               | The waste of the composite profiles can be disposed with the residual waste.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Annotation</b>             | Notice the additional treatment notes and the datasheets of the used filling compound.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Customs tariff number</b>  | 39162000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Opened label</b>           | Purchase also possible as a single item:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

| Item number | Length (cm) | Plaster thickness | Material  | Packaging unit |
|-------------|-------------|-------------------|-----------|----------------|
| 114761      | 3,050.00    | 1 mm              | Composite | 8 ROL / 24 BOX |

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!