


# PRODUCT DATA SHEET

Composite bead EDGE-TAPE for connections in drylining  
Item no. 37334



Status: 01.08.2026 | 20:34

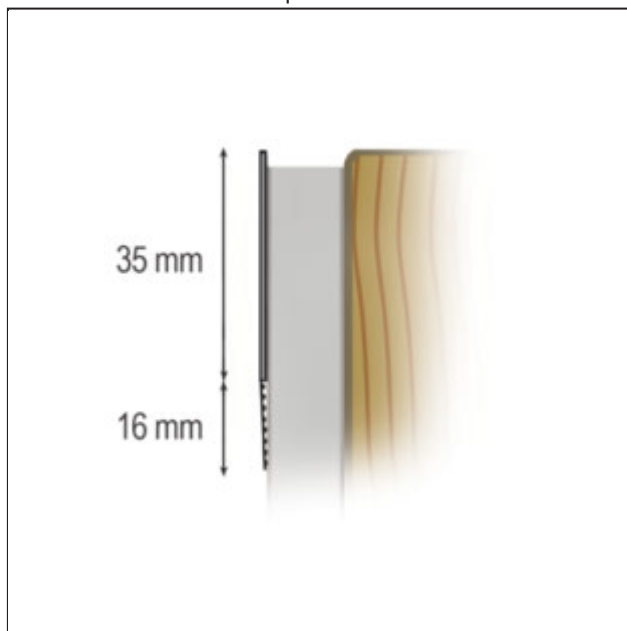

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Designation</b>           | Composite bead EDGE-TAPE for connections in drylining                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Description</b>           | Flexible, paper-concealed composite profile for making perfect connections to windows or other wall connections in drywall construction. The roll material allows an individual adjustment of the profile to the edge and thus reduces waste and costs. Excellent adhesion of the filler as a result of the completely fibre-coated surface of the composite profile.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Product area</b>          | Interior finishing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Product category</b>      | Filler profiles   Composite profiles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Plaster thickness</b>     | 1 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Material thickness</b>    | 0,8 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Revision</b>              | Putty the paper wing, the remaining profile leg doesn't have to be puttied over completely.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Leg length</b>            | 51 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Application Areas</b>     | For use on drywall plasterboard, for making straight and precise connections to windows and other wall connections. The paper core ensures exceptional edge strength and durability, even in heavily used and stressed areas.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Underground</b>           | The underground has to be sustainable, solid, clean and dry.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Treatment</b>             | 1. Cut the composite to length and cut the profile corner in a 45° angle. 2. Put the suitable filling compound on the underground or directly on the unprinted side of the profile and apply the profile to the edge with the printed side outwards. 3a. Manual alignment or depending on the installation situation with suitable tools, under constant pressure. 3b. When setting paper-coated composite profiles with ROTEKTOR profile adhesive, the paper wings perforated in the edge area must be pressed separately onto the substrate that is fully coated with profile adhesive. 4. Peel the excess material with a trowel and use this for putting the legs until the head of the profil. After the drying of the filling compound, the edge can be grinded. 5. With that, the treatment of the composite is finished. Depending on the required surface quality (Q3-Q4), additional filler plies can be necessary. Please notice the technical datasheet of the used filling compound. Don't use under +5°C air-, object- and drying temperature. |
| <b>Consumption</b>           | The rolled products can be cut on the individual length of the edge on the object and reduce by this waste and costs. The consumption of filling compound depends on the structure of the surface and the absorbency of the underground as well as the qualities of the filling compound. Compared to conventional filler profiles, the material input becomes reduced.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Tool</b>                  | Cut the composite profile to length with a standard scissors, for example 1451.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Treatment Temperature</b> | Do not perform the application at air, object or drying temperatures below +5°C.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

# PRODUCT DATA SHEET

Composite bead EDGE-TAPE for connections in drylining  
Item no. 37334



|                               |                                                                                        |
|-------------------------------|----------------------------------------------------------------------------------------|
| <b>Overplastering Ability</b> | Notice the additional treatment notes and the datasheets of the used filling compound. |
| <b>Storage</b>                | Store it cold, dry and protected from moisture.                                        |
| <b>Disposal</b>               | The waste of the composite profiles can be disposed with the residual waste.           |
| <b>Annotation</b>             | Notice the additional treatment notes and the datasheets of the used filling compound. |
| <b>Customs tariff number</b>  | 39162000                                                                               |

| Item number | Length (cm) | Plaster thickness | Material  | Packaging unit  |
|-------------|-------------|-------------------|-----------|-----------------|
| 114994      | 3,050.00    | 1 mm              | Composite | 12 ROL / 20 BOX |

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!