


PRODUCT DATA SHEET

Composite bead TUFF-TAPE for corners and joints
roll
Item no. 37339



Status: 01.08.2026 | 20:38

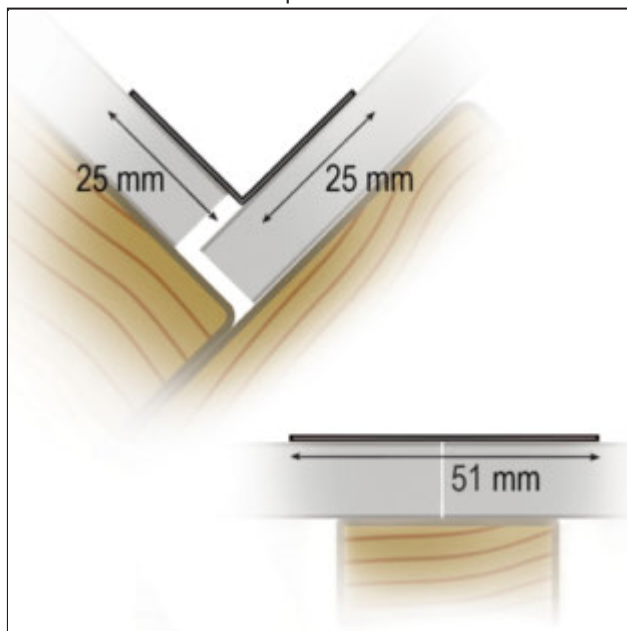

Designation	Composite bead TUFF-TAPE for corners and joints roll
Description	Flexible, paper-flocked PROTEKTOR composite profile from the roll is suitable for inner edges in all angle positions and for crack-free bridging of panel joints. Fold the profile into the desired angle position. Rolled goods allow the profile to be individually adapted to the edge and joint length, thereby reducing waste and costs.
Product area	Interior finishing
Product category	Filler profiles Composite profiles
Plaster thickness	1 mm
Material thickness	0,8 mm
Product width	51 mm
Application Areas	For the use on gypsum plasterboards in the drywall construction, for the production of straight and precise inside edges and plate joints. The PVC core provides exceptional edge strength and durability.
Underground	The underground has to be sustainable, solid, clean and dry.
Treatment	1. Cut the composite to length and when used as an edge profile put it in the right angle by folding, for example with the folding tool Flex-Folder 1479, cut the profile corner in a 45° angle. 2. Put the suitable filling compound on the underground or directly on the unprinted side of the profile, for example with the material feeders Mud-Pro MP2 1472, and apply the profile to the edge or plate joint. 3. Setting the profile with the printed side outwards on. Fixing with the hands or with suitable tools, for example the outside edge roller OSR 1473 or the inside edge roller ISR 1477, under constant pressure. 4. Peel the excess material with a trowel and use this for puttying the embossed wings. After the drying of the filling compound, the edge or surface can be grinded. 5. With that, the treatment of the composite is finished. Depending on the required surface quality (Q3-Q4), additional filler plies can be necessary. Please notice the technical datasheet of the used filling compound. Don't use under +5°C air-, object- and drying temperature.
Consumption	The rolled products can be cut on the individual lengths on the object and reduce by this waste and costs. The consumption of filling compound depends on the structure of the surface and the absorpency of the underground as well as the qualities of the filling compound. Compared to conventional filler profiles, the material input becomes reduced.
Tool	For the efficient adjustment of the profile edge, the Flex-Folder 1479 is recommended. An optimal and efficient treatment is able by the material feeders Mud-Pro MP2 1472. For ensuring an optimal contact pressure, use the outside edge roller OSR 1473 or the inside edge roller ISR 1477.
Treatment Temperature	Do not use at air, object or drying temperatures below +5°C.

PRODUCT DATA SHEET

Composite bead TUFF-TAPE for corners and joints
roll
Item no. 37339



Overplastering Ability	Notice the additional treatment notes and the datasheets of the used filling compound.
Storage	Store it cold, dry and protected from moisture.
Disposal	The waste of the composite profiles can be disposed with the residual waste.
Annotation	Notice the additional treatment notes and the datasheets of the used filling compound.
Customs tariff number	39162000
Opened label	Purchase also possible as a single item:

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
115031	3,050.00	1 mm	Composite	12 ROL / 24 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!