


PRODUCT DATA SHEET

Composite bead MEDIUM for corners in dry lining
role
Item no. 37349



Status: 02.08.2026 | 16:56

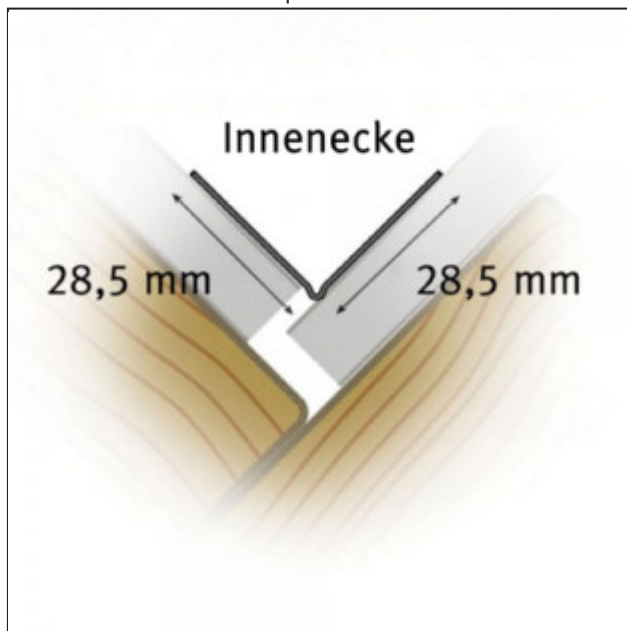

Designation	Composite bead MEDIUM for corners in dry lining role
Description	The flexible paper-flocked PROTEKTOR composite profile on a roll is particularly suitable for ceiling-high internal edges. The elongated perforated edge design ensures excellent adhesion to the plasterboard substrate. The composite profile has a higher tear resistance than paper or fabric tapes and prevents paper lint during surface finishing and sanding.
Product area	Interior finishing
Product category	Composite profiles
Plaster thickness	1 mm
Material thickness	0,8 mm
Product width	57 mm
Revision	Smooth the surface of the composite. Once the levelling compound has dried, a further coat can be applied if required.
Leg length	28,5 mm
Application Areas	Particularly suitable as an edge profile for ceiling-high internal edges at all angles.
Underground	The substrate must be stable, solid, clean and dry.
Treatment	1. Cut the strip to size, cut off the corners at a 45° angle. 2. Apply the appropriate levelling compound to the substrate and apply the repair strip. 3. Align by hand using even pressure. 4. Remove the excess material with a spatula and level the strips evenly. Once the filler has dried, the filled crack tape can be lightly sanded with 120 grit sandpaper. Crack-Tape does not fluff like paper or fabric tapes. 5. The processing of the composite is now complete. Depending on the required surface quality (Q3-Q4), additional layers of filler may be necessary.
Consumption	Roll goods can be cut to the individual length on site, thus reducing waste and costs. The consumption of levelling compound depends on the surface structure and absorbency of the substrate as well as the properties of the levelling compound and is significantly reduced compared to conventional levelling profiles.
Tool	It can be applied with all standard drywall tools.
Treatment Temperature	Do not apply below +5°C air, object and drying temperature.
Overplastering Ability	Please observe the additional processing instructions and data sheets for the levelling compounds used.
Storage	Store in a cool, dry place protected from moisture.

PRODUCT DATA SHEET

Composite bead MEDIUM for corners in dry lining
role
Item no. 37349



Disposal	Offcuts of the composite strips can be disposed of with the residual waste.
Annotation	Please observe the additional processing instructions and data sheets for the levelling compounds used.
Customs tariff number	39162000
Opened label	Purchase only possible in full pallets.

Item number	Length (cm)	Plaster thickness	Packaging unit
120426	3,050.00	1 mm	12 ROL / 24 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!