



PRODUCT DATA SHEET

Metal sheet featured bead for thermal insulation
8 mm
Item no. 3749

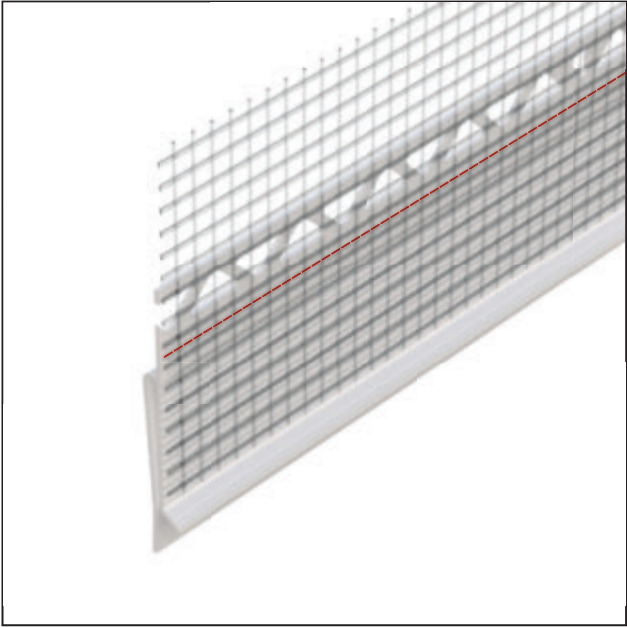

Status: 01.08.2026 | 00:16

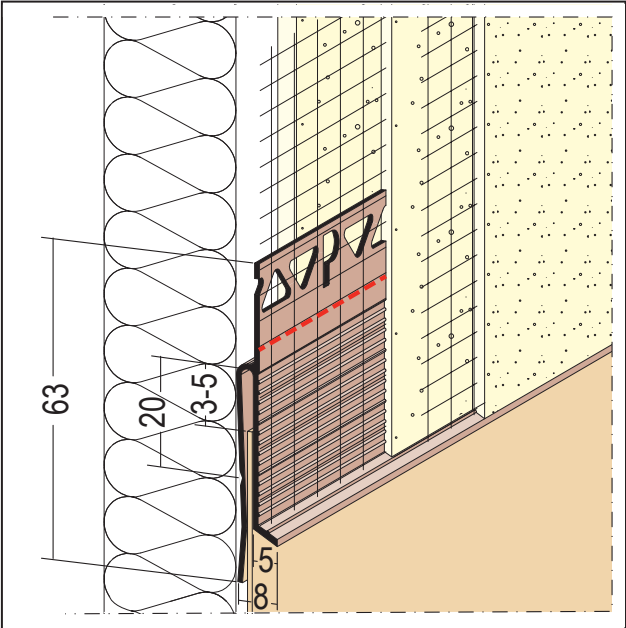

Designation	Metal sheet featured bead for thermal insulation 8 mm
Description	PROTEKTOR metal connection profile made of PVC, with sewn-on alkali-resistant glass fibre mesh, suitable for forming sheet metal flashings for thermal insulation with 8 mm plaster thickness.
Product area	Thermal insulation
Product category	Connection and end profiles
Plaster thickness	8 mm
Grammage	160 g/m ²
Mesh size	4 x 4 mm
Treatment	The insertion leg can be shortened by a predetermined breaking point of 20 mm.
Overplastering Ability	One-sided tissue protrusion of 10 cm at the end of the bar.
Annotation	One-sided tissue protrusion of 10 cm at the end of the bar.
Customs tariff number	39269097
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
116913	250.00	8 mm	Rigid PVC with glass fibre mesh	10 - white	20 PCS / 40 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!