


PRODUCT DATA SHEET

Movement joint bead for dry lining
for filling
Item no. 37507



Status: 01.08.2026 | 17:08

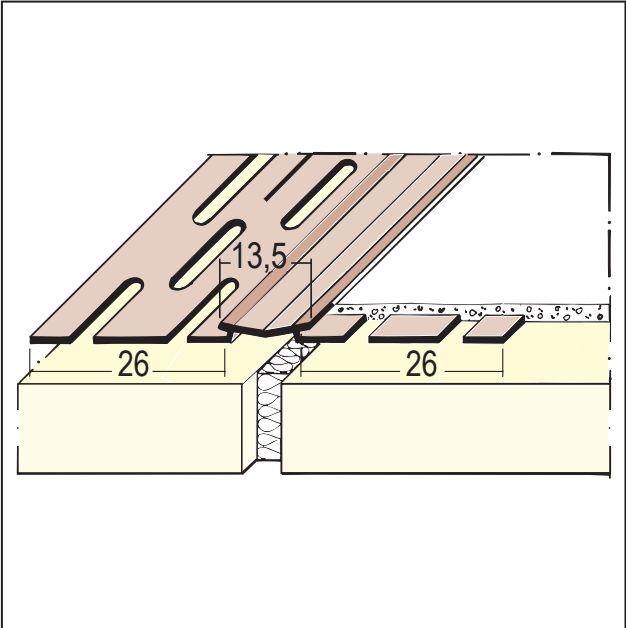

Designation	Movement joint bead for dry lining for filling
Description	PROTEKTOR movement bead made of PVC with soft PVC centre section for forming movement joints in walls or ceilings in accordance with the requirements of DIN 18181. Suitable for installation in flat surfaces and internal corners.
Product area	Interior finishing
Product category	Filler profiles
Plaster thickness	1 mm
GK/Plate	ab 8 mm
	13 mm
Revision	PVC central piece offers limited possibilities for applying suitable coatings. Approval is required from the coating material manufacturer.
Motion recording train / print	+/-1,5 mm
Treatment	All profiles must also be fastened with clips.
Customs tariff number	39162000
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
118343	305.00	1 mm	Rigid PVC with soft PVC	10 - white	50 PCS / 80 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!