



PRODUCT DATA SHEET

Floor featured bead for thermal insulation
60 mm/6 mm
Item no. 37520

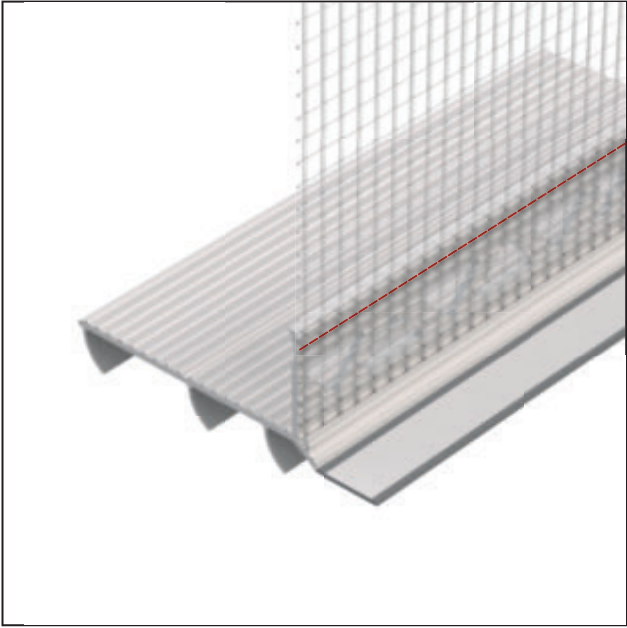

Status: 01.08.2026 | 21:21

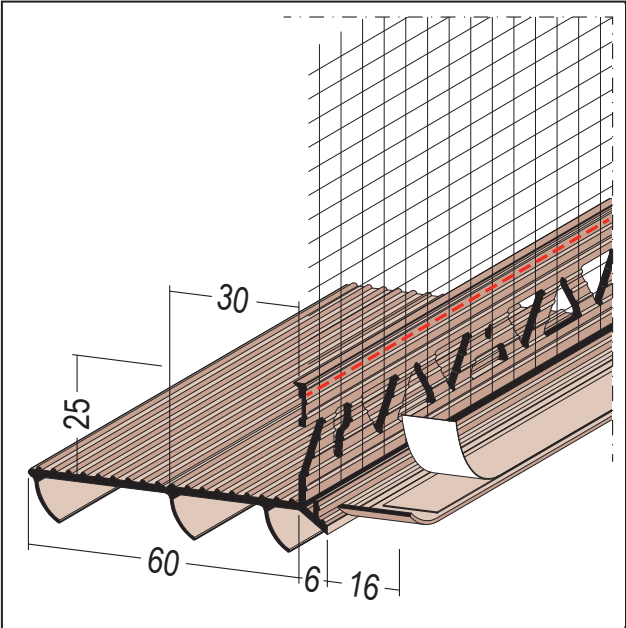

Designation	Floor featured bead for thermal insulation 60 mm/6 mm
Description	PROTEKTOR PVC floor connection profile with drip edge for 6 mm plaster thickness. Plaster leg with sewn-on alkali-resistant mesh for inserting connections between thermal insulation and existing coverings, for example.
Product area	Thermal insulation
Product category	Connection and end profiles Base profiles
Plaster thickness	6 mm
	<30 mm
Grammage	160 g/m²
Mesh size	4 x 4 mm
Treatment	The insertion leg can be shortened by a predetermined breaking point of 60 mm to 30 mm.
Overplastering Ability	One-sided tissue protrusion of 10 cm at the end of the bead.
Annotation	One-sided tissue protrusion of 10 cm at the end of the bead.
Customs tariff number	39269097
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
116008	200.00	6 mm	Rigid PVC with glass fibre mesh	10 - white	10 PCS / 25 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!