


PRODUCT DATA SHEET

Plain bearing joint profile for ETICS
40 mm/6 mm
Item no. 37540



Status: 01.08.2026 | 21:22

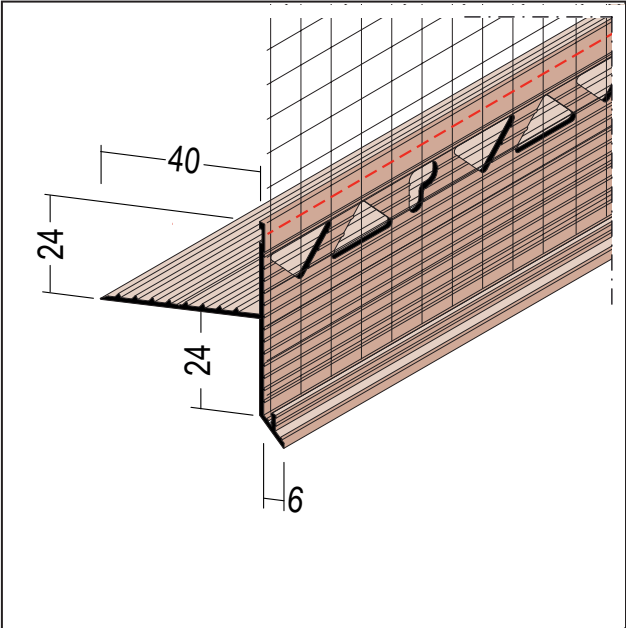

Designation	Plain bearing joint profile for ETICS 40 mm/6 mm
Description	PROTEKTOR PVC plain bearing joint profile. Insert profile for forming sliding bearing joints in ETICS systems. Particularly suitable for creating joints in lightweight building extensions. Hooks on the insert leg counteract the expansion pressure of the pre-compressed sealing tape.
Product area	Thermal insulation
Product category	Joint profiles
Plaster thickness	6 mm
Product width	46 mm
Leg length	40 mm
Product height in mm	54 mm
Treatment	Profile for subsequent insertion into the plain bearing joint, e.g. between a massive old building and a building extension in lightweight construction. Permanent sealing can be realized between the downside leg and the building by using a pre-compressed sealing tape. Pull the fabric in the reinforcement layer to the bottom edge of the profile. Corners must be mitred, the fabric and sealing tape must be sufficiently led around the corner. Insert profiles are matched to organic and mineral plaster buildings.
Customs tariff number	39269097
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
115994	250.00	6 mm	Rigid PVC with glass fibre mesh	10 - white	15 PCS / 13 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!