

PRODUCT DATA SHEET



Stop profile for dry lining

9,5/12,5 mm PB

Item no. 3768



Status: 22.08.2024 | 01:08

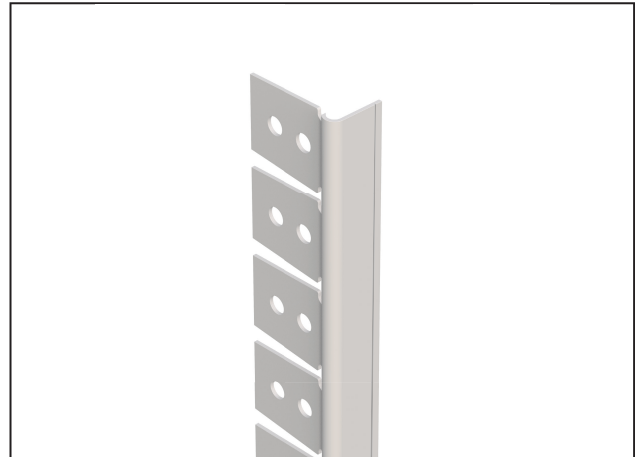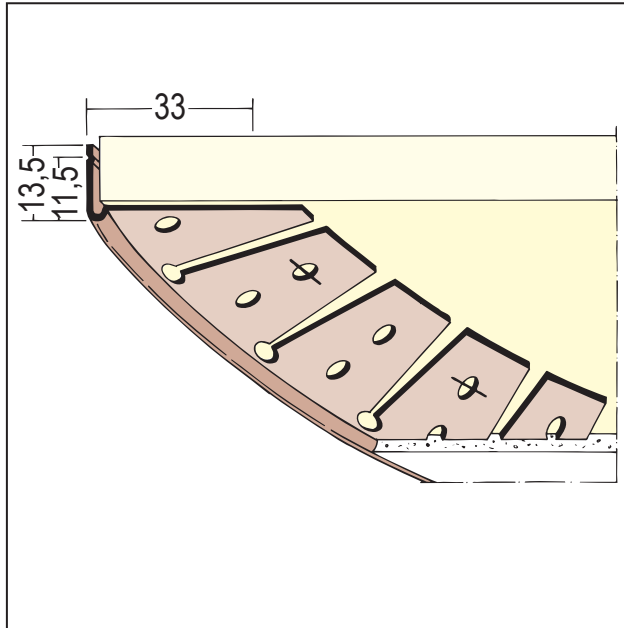

| | |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Designation | Stop profile for dry lining 9,5/12,5 mm PB |
| Description | PVC corner profile, cut along one side, for creating ceiling edges along curved walls. Universal application for panels with a thickness of 10 mm or 12.5 mm thanks to easily detachable strips. Bend profile by hand and plaster over completely. The profile must also be fastened with galvanised clips in order to avoid resetting. |
| Product area | Internal construction |
| Product category | Filler profiles |
| Plaster thickness | 1 mm |
| Material | Hard PVC |
| GK/Plate | 9,5 / 12,5 mm |
| Product length | 300 cm |
| Productcolor | 10, white |
| Treatment | All profiles must also be fastened with clips. Minimum bend radius > 30 cm. |
| Packaging Unit | 20 PCS / 182 BOX |

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!