

# PRODUCT DATA SHEET



Frameseal bead with shadow gap, mesh

6 mm

Item no. 37806



Status: 18.06.2024 | 12:06

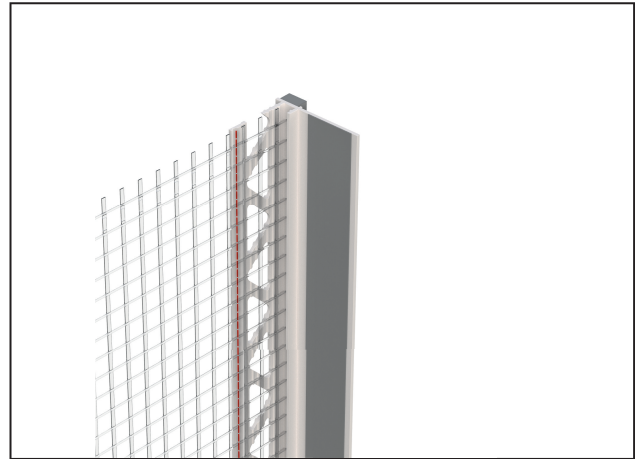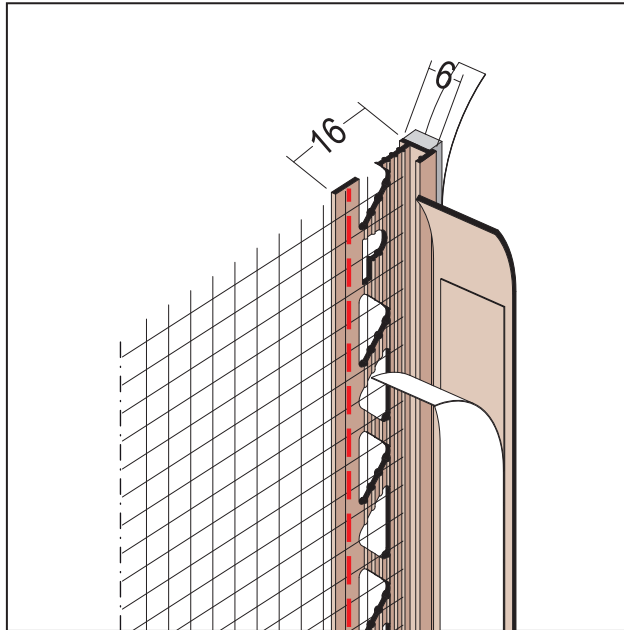

<b>Designation</b>	Frameseal bead with shadow gap, mesh 6 mm
<b>Description</b>	PROTEKTOR Self-adhesive white PVC window frame sealing bead with alkali-resistant fibreglass mesh, shadow joint and detachable adhesive tab for coverage foil. Self-adhesive, closed-cell foam tape. For heat insulation with 6-mm plaster thickness. With perforated plastering leg for high-strength bonding. Creates visually and technically perfect soffit connections. Test-certified resistance to air, wind and heavy rain.
<b>Product area</b>	Thermal insulation
<b>Product category</b>	Soffit profiles
<b>Plaster thickness</b>	6 mm
<b>Material</b>	Rigid PVC with glass fibre mesh
<b>Product width</b>	6 mm
<b>Product length</b>	260 cm
<b>Air and component temperature</b>	+5° bis +40°C
<b>Grammage</b>	160 g/m <sup>2</sup>
<b>Mesh size</b>	4 x 4 mm
<b>Productcolor</b>	10, white
<b>Appearance</b>	Self-adhesive, closed-cell foam tape.
<b>Underground</b>	Bonding areas must be even, dry (note possible condensation), free of frost, dust, grease, solid and load-bearing. An adhesive test indicates whether the substrate is suitable for bonding or whether special measures (e.g. cleaning) are required.
<b>Treatment</b>	For underground with lightness value greater than 7.
<b>Packaging Unit</b>	50 PCS / 13 BOX
<b>Storage</b>	Store profiles dry, frost-free, horizontally and flat in the box. Do not store or transport profiles which are twisted or bent. Protect cartons and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the carton over its entire length.
<b>Impermeability to driving rain</b>	bis 1050 Pa
<b>Annotation</b>	Single-sided mesh overlap of 10 cm from end of bar.

# PRODUCT DATA SHEET

Frameseal bead with shadow gap, mesh

6 mm

Item no. 37806



<b>Movement according to ÖNORM B6400/ ÖAP VAR VII</b>	Klasse IC
<b>product line</b>	BasicLine
<b>Test report</b>	Geprüfte Luft-, Wind- und Schlagregendichtheit, geprüfte Bewegungsaufnahme. Die jeweils aktuellen Prüfberichte stehen auf <a href="http://www.protektor.de">www.protektor.de</a> zum Download bereit.
<b>Leaflet</b>	* Instruction sheet for association guidelines on connections to windows and shutters for plaster, thermal insulation composite systems and dry construction, published by the Association of Plasterers for Interiors and Facades., * Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM).
<b>connection joint</b>	Schattenfuge
<b>Shadow gap</b>	3 mm

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!