

PRODUCT DATA SHEET



Stop bead with mesh for thermal insulation

14 mm

Item no. 37914



Status: 31.07.2026 | 23:44

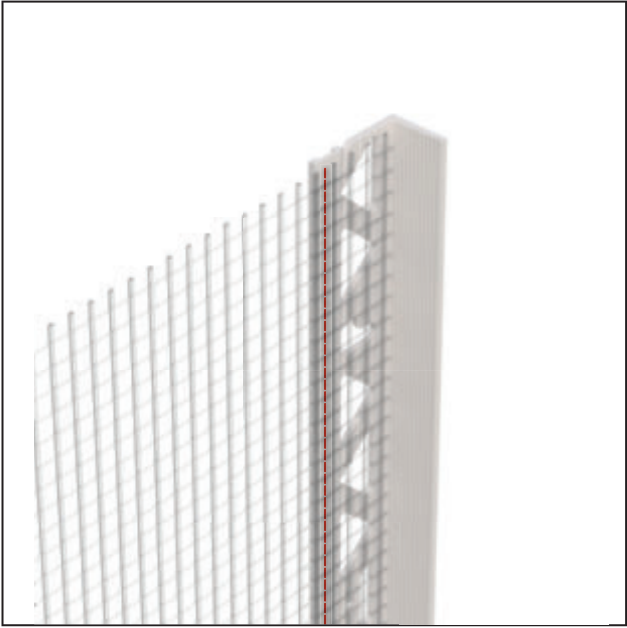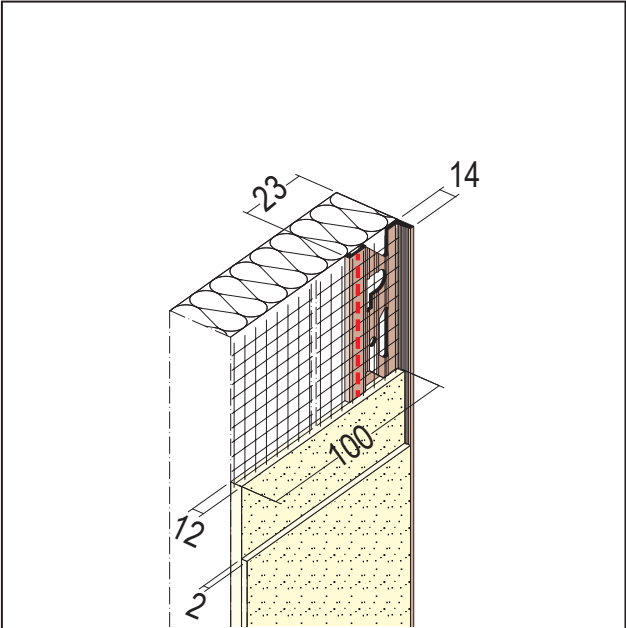

Designation	Stop bead with mesh for thermal insulation 14 mm
Description	The PROTEKTOR PVC plaster finishing profile, with sewn-on alkali-resistant glass fibre mesh, is suitable for plaster thicknesses of 14 mm or more on thermal insulation.
Product area	Thermal insulation
Product category	Connection and end profiles
Plaster thickness	14 mm
Grammage	160 g/m ²
Mesh size	4 x 4 mm
Overplastering Ability	One-sided tissue protrusion of 10 cm at the end of the bar.
Annotation	One-sided tissue protrusion of 10 cm at the end of the bar.
Customs tariff number	39269097
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
111927	250.00	14 mm	Rigid PVC with glass fibre mesh	10 - white	40 PCS / 40 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!