

PRODUCT DATA SHEET



Base profile for thermal insulation

6 mm, 100 mm

Item no. 37964



Status: 01.08.2026 | 20:43

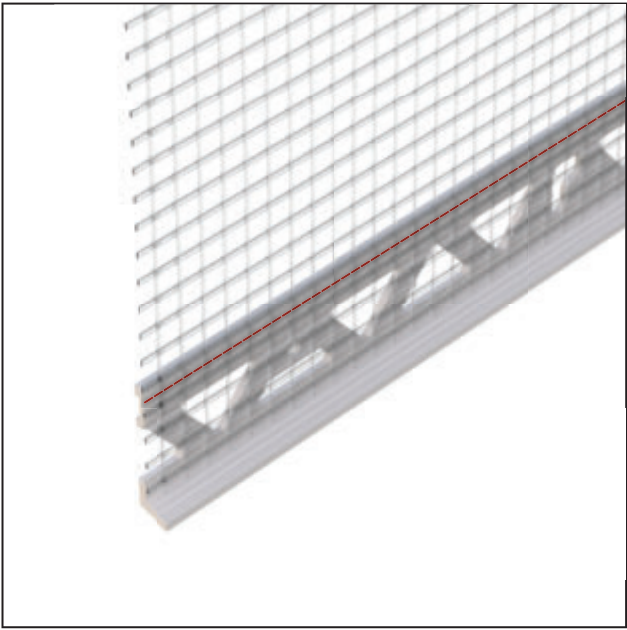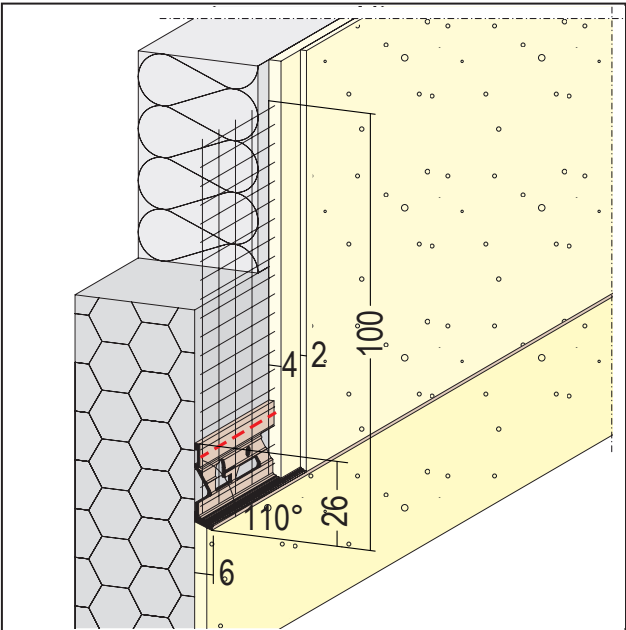

Designation	Base profile for thermal insulation 6 mm, 100 mm
Description	PROTEKTOR PVC drip bead with sewn-on alkali-resistant glass fibre mesh is suitable for ETICS systems with a plaster thickness of 6 mm or more.
Product area	Thermal insulation
Product category	Connection and end profiles Base profiles
Plaster thickness	6 mm
Grammage	160 g/m ²
Mesh size	4 x 4 mm
Application Areas	For ETICS with flush-mounted socle and separate reinforcement layer, For a safe execution of flush-mounted socle areas it is advisable to separate the reinforcement layer or at least the structural render with a stop profile or a base profile, The profile will be selected by the thickness of the plaster,
Overplastering Ability	One-sided tissue protrusion of 10 cm at the end of the bar.
Annotation	One-sided tissue protrusion of 10 cm at the end of the bar.
Customs tariff number	39269097
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
115169	250.00	6 mm	Rigid PVC with glass fibre mesh	10 - white	50 PCS / 40 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!