

PRODUCT DATA SHEET



Frameseal bead with shadow gap, membrane

13 mm

Item no. 38613



Status: 02.08.2026 | 04:51

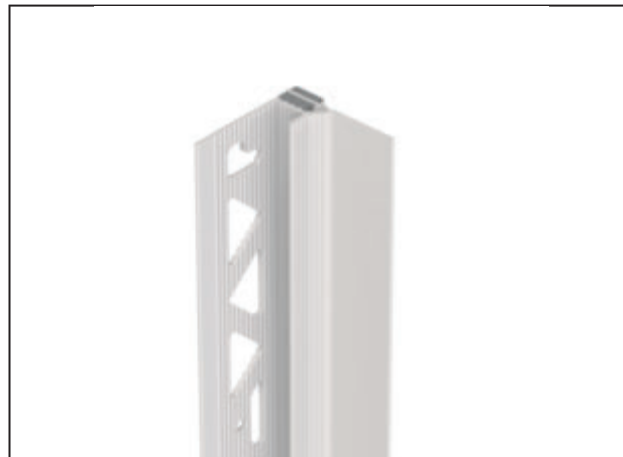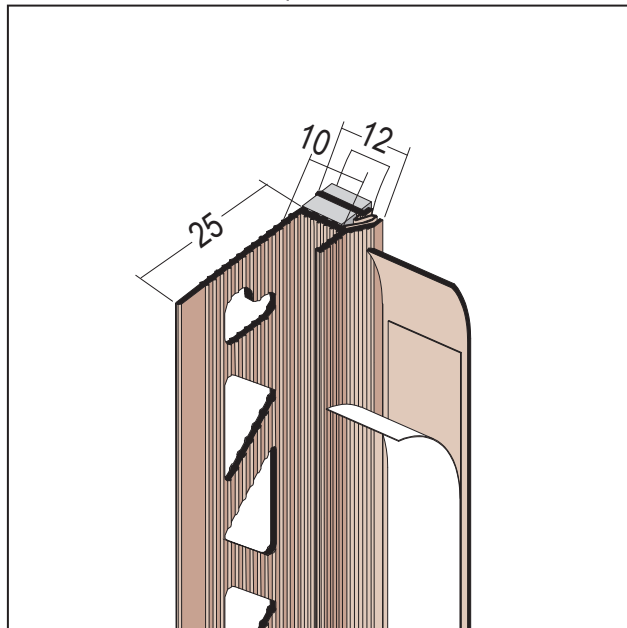

Designation	Frameseal bead with shadow gap, membrane 13 mm
Description	The self-adhesive PROTEKTOR plaster sealing strip with membrane made of PVC with shadow gap and tear-off adhesive tab for foil covering is suitable for creating visually and technically flawless connections of windows, doors and other components to plaster. The membrane allows increased movement absorption. With perforated plastering leg for high-strength plaster bond. Profile width 13 mm for interior plastering and exterior rendering with additional peeling edge for base plasters from 10 mm and final finishing plasters with a nominal thickness of approx. 2-3 mm.
Product area	Interior plaster Exterior plaster
Product category	Soffit profiles
Plaster thickness	13 mm
Product width	13 mm
Underground	Bonding areas must be even, dry (note possible condensation), free of frost, dust, grease, solid and load-bearing. An adhesive test indicates whether the substrate is suitable for bonding or whether special measures (e.g. cleaning) are required.
Treatment	Pull off the cover strip of the foam tape approx. 10 -15 cm, then place the profile in the desired position, then gradually fix the cover strip on the rear-side of the profile by pressing it on. Back profile joints with pre-compressed joint sealing tape and arrange only in the upper third of the soffit. Piecing up of the strips is not permitted. Existing plaster legs must be completely backfilled and covered. Air pockets and cavities behind the profiles are not permitted and reduce the force-fit embedding. Do not plaster or paint over the visible PVC bar . Maximum window height 3.9 m (with single bar length 2.6 m). Can be used on substrates with a luminosity value bigger than 7. Please observe the PROTEKTOR selection criteria, processing information and installation recommendations.
Treatment Temperature	Processing at air and component temperatures from +5° to +40°C. Can be used on substrates with a brightness value > 20.
Storage	Store profiles dry, frost-free, horizontally and flat in the box. Do not store or transport profiles which are twisted or bent. Protect cartons and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the carton over its entire length.
Impermeability to driving rain	bis 600 Pa
Movement according to ÖNORM B6400/ÖAP VAR VII	Klasse III
Test report	18/05-A186-Z1

PRODUCT DATA SHEET

Frameseal bead with shadow gap, membrane

13 mm

Item no. 38613



Leaflet

* Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM).

* Guideline for connections to windows and shutters in plaster, thermal insulation composite system and dry construction, published by the Baden-Württemberg Association of Plasterers for Interiors and Facades (SAF).

Customs tariff number

39259080

Opened label

Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
119109	260.00	13 mm	Rigid PVC with soft PVC	10 - white	30 PCS / 50 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!