

PRODUCT DATA SHEET




Frameseal bead with shadow gap, membrane and mesh

7 mm

Item no. 38807



Status: 01.08.2026 | 17:29

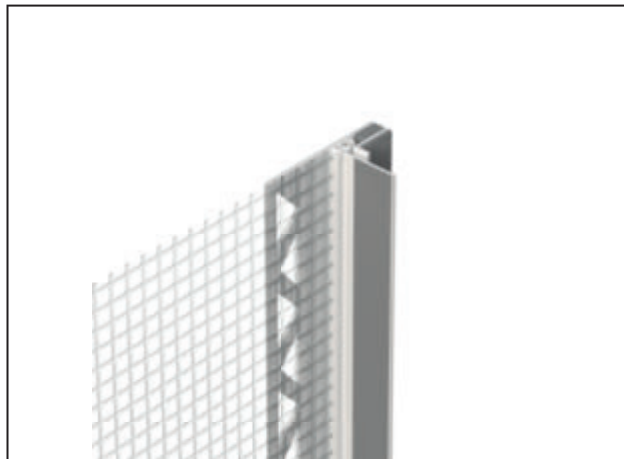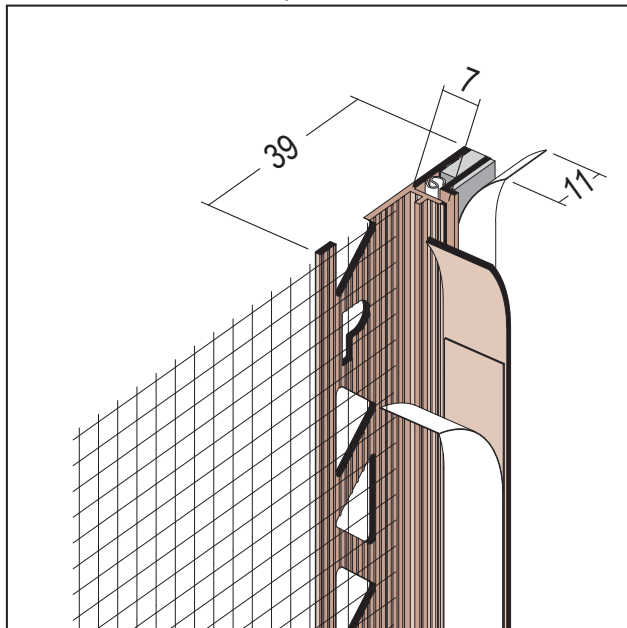

Designation	Frameseal bead with shadow gap, membrane and mesh 7 mm
Description	The self-adhesive PROTEKTOR frame seal bead with PVC membrane with shadow gap, alkali-resistant glass fibre mesh and tear-off adhesive tab for foil covering is suitable for creating visually and technically flawless connections between windows, doors and other components and plaster and ETICS systems. The membrane allows for increased movement absorption. With perforated plastering leg and sewn-on mesh for high-strength plaster integration. Profile width 7 mm for ETICS systems and plaster from 7 mm.
Product area	Thermal insulation
Product category	Soffit profiles
Plaster thickness	7 mm
Product width	7 mm
Air and component temperature	+5° bis +40°C
Grammage	145 g/m ²
Mesh size	4 x 4 mm
Appearance	Self-adhesive, closed-cell foam tape.
Underground	Adhesive areas must be flat, dry (note possible condensation), free of frost, dust and grease, and firm and stable. An adhesive test will determine whether the substrate is suitable for adhesion or whether special measures (e.g. cleaning) are required.
Treatment	Pull off the cover strip of the foam tape approx. 10 -15 cm, then place the profile in the desired position, then gradually fix the cover strip on the rear-side of the profile by pressing it on. Back profile joints with pre-compressed joint sealing tape and arrange only in the upper third of the soffit. Piecing up of the strips is not permitted. Existing plaster legs must be completely backfilled and covered. Air pockets and cavities behind the profiles are not permitted and reduce the force-fit embedding. Do not plaster or paint over the the visible PVC bar . Maximum window height 3.9 m (with single bar length 2.6 m). Can be used on substrates with a luminosity value bigger than 7. Please observe the PROTEKTOR selection criteria, processing information and installation recommendations.
Overplastering Ability	Single-sided mesh overlap of 10 cm from end of bar.
Storage	Store profiles dry, frost-free, horizontally and flat in the box. Do not store or transport profiles which are twisted or bent. Protect cartons and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the carton over its entire length.
Impermeability to driving rain	bis 1050 Pa
Annotation	Single-sided mesh overlap of 10 cm from end of bar.

PRODUCT DATA SHEET

Frameseal bead with shadow gap, membrane and mesh

7 mm

Item no. 38807



Movement according to ÖNORM B6400/ÖAP VAR VII	Klasse III
Movement according to VDPM leaflet/SAF guideline	Klasse A
product line	ProLine
Test report	Geprüfte Luft-, Wind- und Schlagregendichtheit, geprüfte Bewegungsaufnahme. Die jeweils aktuellen Prüfberichte stehen auf www.protektor.de zum Download bereit.
Leaflet	* Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM). * Guideline for connections to windows and shutters in plaster, thermal insulation composite system and dry construction, published by the Baden-Württemberg Association of Plasterers for Interiors and Facades (SAF).
Shadow gap	3 mm
Customs tariff number	39259080
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
114672	260.00	7 mm	Rigid PVC with soft PVC and glass fibre mesh	10 - white	25 PCS / 40 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!