

PRODUCT DATA SHEET



Frameseal bead with shadow gap, membrane and mesh

10 mm

Item no. 38810



Status: 01.08.2026 | 17:27

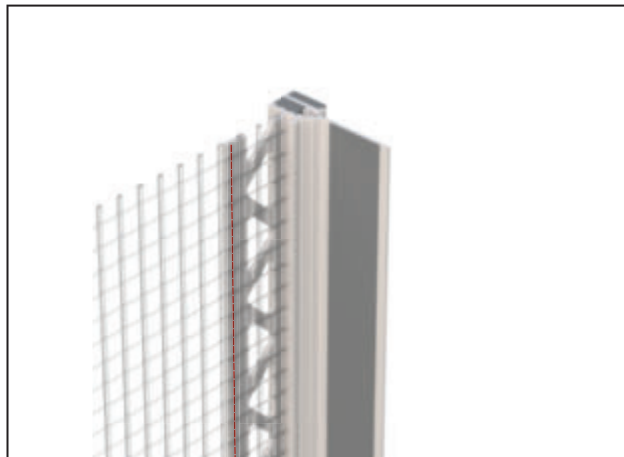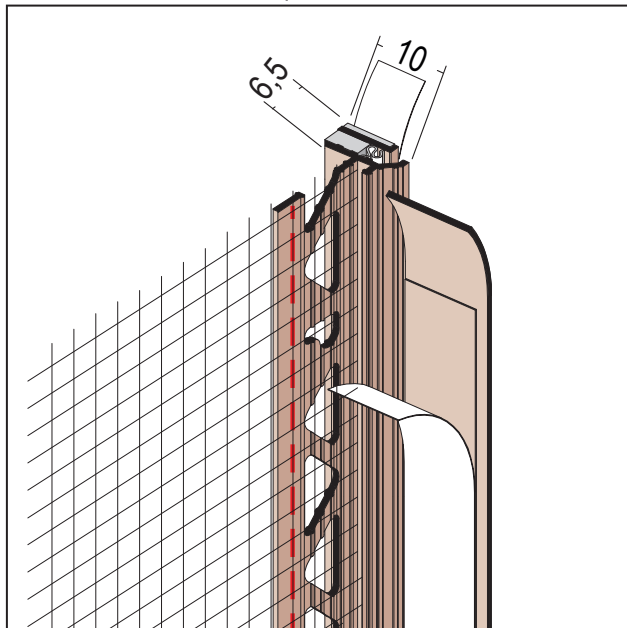

Designation	Frameseal bead with shadow gap, membrane and mesh 10 mm
Description	The self-adhesive PROTEKTOR frame seal bead with PVC membrane with shadow gap, sewn-on alkali-resistant glass fibre mesh and tear-off adhesive tab for foil covering is suitable for creating visually and technically flawless connections between windows, doors and other components and plaster and ETICS systems. The membrane allows for increased movement absorption. With perforated plastering leg and sewn-on mesh for high-strength plaster integration. Profile width 10 mm for ETICS systems with plaster thicknesses from 6 mm and plaster from 10 mm.
Product area	Thermal insulation
Product category	Soffit profiles
Plaster thickness	10 mm
Product width	10 mm
Air and component temperature	+5° bis +40°C
Grammage	160 g/m ²
	3 mm
	5 mm
Mesh size	4 x 4 mm
Appearance	Self-adhesive, closed-cell foam tape.
Underground	Adhesive areas must be flat, dry (note possible condensation), free of frost, dust and grease, and firm and stable. An adhesive test will determine whether the substrate is suitable for adhesion or whether special measures (e.g. cleaning) are required.
Treatment	Profile joints have to be sealed up with a compressed compriband behind. Can be used for windows with a maximum size of 10 sqm and insulation material with a thickness up to 300 mm. The use for window sizes larger than 10 sqm or a ratio width to length bigger than 1:3 or insulation material thicker than 300 mm has to be acknowledged by the manufacturer of the ETICS. For underground with lightness value greater than 7.
Overplastering Ability	Single-sided mesh overlap of 10 cm from end of bar.
Storage	Store profiles in a dry, frost-free place, lying flat and horizontally in the box. Do not store or transport profiles in a twisted or bent position. Protect boxes and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the box along its entire length.
Impermeability to driving rain	bis 600 Pa
Annotation	Single-sided mesh overlap of 10 cm from end of bar.

PRODUCT DATA SHEET

Frameseal bead with shadow gap, membrane and mesh

10 mm

Item no. 38810



Movement according to ÖNORM B6400/ÖAP VAR VII	Klasse III
Movement according to VDPM leaflet/SAF guideline	Klasse A
product line	ProLine
Test report	Geprüfte Luft-, Wind- und Schlagregendichtheit, geprüfte Bewegungsaufnahme. Die jeweils aktuellen Prüfberichte stehen auf www.protektor.de zum Download bereit.
Leaflet	* Leaflet * Fiche technique Formation de détails avec des profilés et des bandes d'étanchéité de joints pour l'enduit extérieur et l'ETICS, éditeur Verband für Dämmsysteme, Putz und Mörtel e.V. (VDPM). * Guideline for connections to windows and shutters in plaster, thermal insulation composite system and dry construction, published by the Baden-Württemberg Association of Plasterers for Interiors and Facades (SAF).
Shadow gap	2 mm
Customs tariff number	39259080
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
114524	260.00	10 mm	Rigid PVC with soft PVC and glass fibre mesh	10 - white	25 PCS / 20 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!