



PRODUCT DATA SHEET

Movement bead
Screed
Item no. 3916

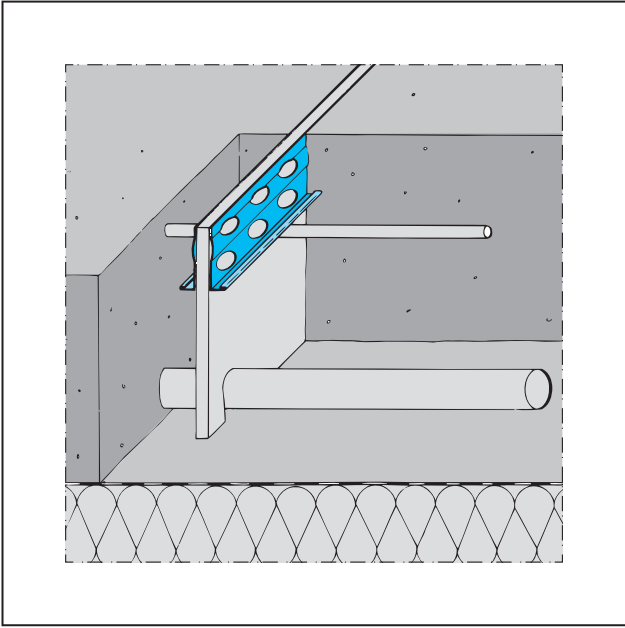

Status: 31.07.2026 | 21:52

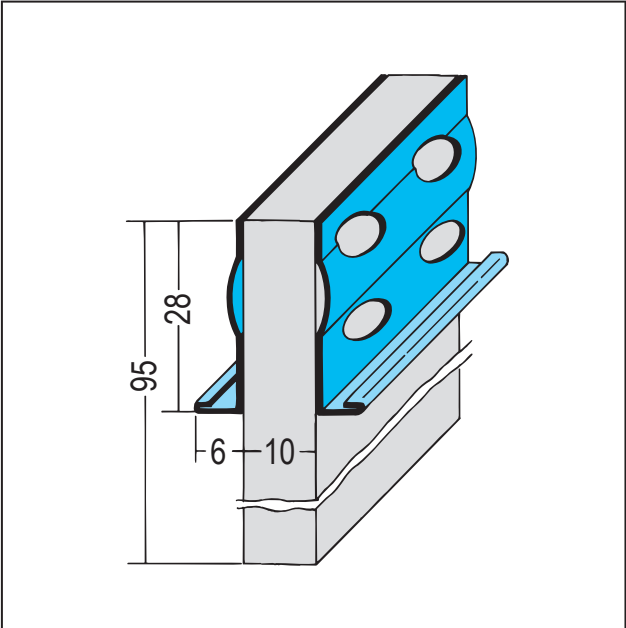

Designation	Movement bead Screed
Description	PROTEKTOR movement bead for screeds is used to create movement joints with shear force dowelling. The profile is particularly suitable for cement screeds. Cut the profile to the required height before installation and install it at the desired height. The cement screed can be smoothed cleanly onto the upper edge of the profile. The screed dowels supplied with a smooth and elastic plastic coating are inserted directly under the metal rail. The screed dowels enable transverse force dowelling and reduce any possible height offset of the screed. The heating pipes for underfloor heating can be laid through the PE strip. Function: • Expansion joint • Particularly suitable for cement screeds • Straight joint line • Clean surface finish • Transverse force dowelling • Height offset
Product area	Concrete / Screed
Product category	Joint profiles
Overplastering Ability	90 screed dowels nr. 3940 are enclosed in the packaging.
Annotation	90 screed dowels nr. 3940 are enclosed in the packaging.
Customs tariff number	73269098
Processing instructions	Installation takes place before the screed is laid. Place profile in line with the prescribed joint plan. Install the dowels horizontally at a right angle in relation to the joint at a distance of 30 cm (see installation example).
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
102576	250.00	Galvanised steel + PE foam	10 PCS / 20 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

PRODUCT DATA SHEET

Movement bead

Screed

Item no. 3916



All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!