


PRODUCT DATA SHEET

U-connection profile
100-40-15
Item no. 4410



Status: 31.07.2026 | 21:48

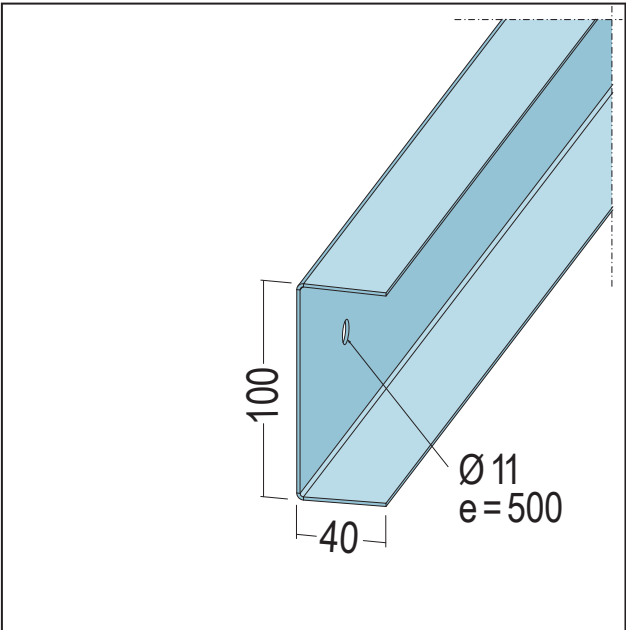

Designation	U-connection profile 100-40-15
Description	Application area: connection profile for walls or free-spanning ceilings.
Product area	Lightweight steel construction
Product category	Vertical Extensions – ediRoofUp Facade Infill Systems – ediWall IF/OS Modular Systems – ediBox Long-Span Beams – ediBeam Facade Renovation – ediRenoFa New Construction – ediBuild Garages – ediCarBox Grandstands – ediStand Load-Bearing Walls – ediWall Roof – ediRoof Intermediate Floor – ediFloor
Material thickness	1,5 mm
Standard EN	EN 1090-1
Product width	100 mm
Reaction to fire (R2F)	A1
Load bearing capacity	NPD
Customs tariff number	73089059
Opened label	Purchase also possible as a single item:

Item number	Length (cm)	Material	Packaging unit
118857	500.00	S320 GD + ZM	1 PCS / 96 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!