



PRODUCT DATA SHEET

Heat conduction plate alu 14 mm
14 mm
Item no. 50914

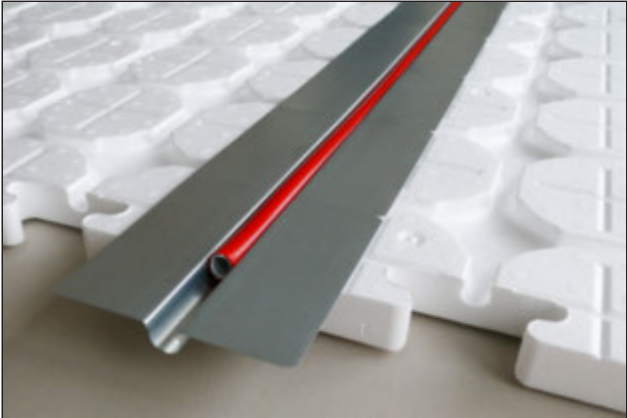

Status: 01.08.2026 | 21:43

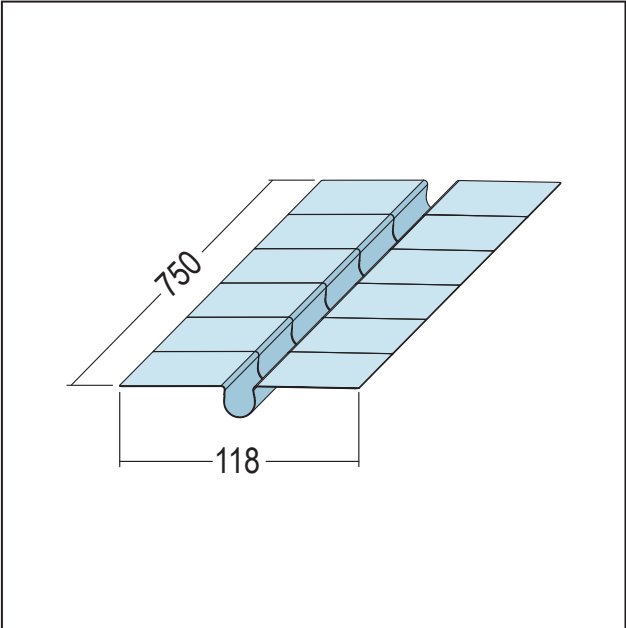

Designation	Heat conduction plate alu 14 mm 14 mm
Description	The heat conducting panels for heat pipes with a diameter of 14 mm ensure that any floor is heated evenly and effectively. The integrated predetermined breaking points allow for easy and quick installation.
Material thickness	0,4 mm
Product width	118 mm
Capacity class	k.A.
Reaction to fire (R2F)	A1
Customs tariff number	73269060
Processing instructions	Place the heat conducting panels in the system panel and install the heating pipes in the grooves. Ideally suited for dry screed, cement screed and floating screed.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
116049	75.00	Aluminum	50 PCE / 27 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!