


PRODUCT DATA SHEET

U Reinforcing profile
UA 50-40-20
Item no. 5129



Status: 31.07.2026 | 21:11

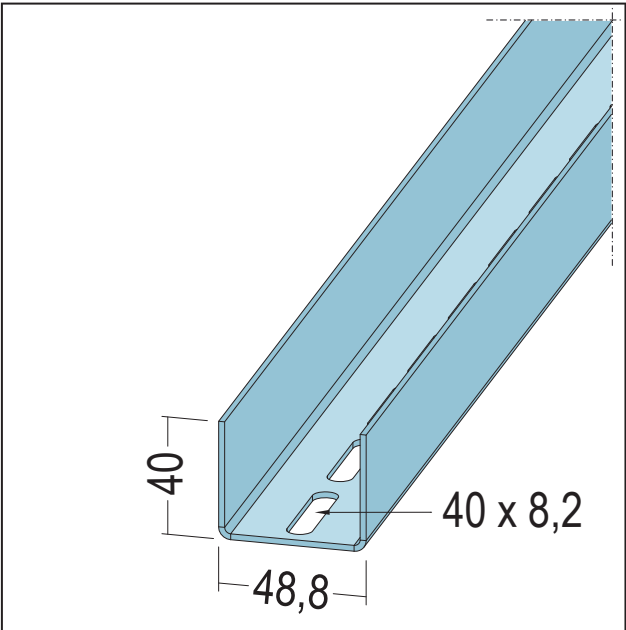

Designation	U Reinforcing profile UA 50-40-20
Description	Application area: walls/wall faces, especially in door areas, or support profiles for free-hanging ceilings.
Product area	Dry lining Lightweight steel construction
Product category	Stand profiles for ceiling and wall Long-Span Beams – ediBeam
Material thickness	2 mm
Standard EN	EN 14195:2005/AC:2006
Standard	DIN18182-1
Galvanizing	tested to standard
Product width	48,8 mm
Reaction to fire (R2F)	A1
Customs tariff number	73089059
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
109897	250.00	Galvanised steel	6 PCS / 15 BUN
109898	260.00	Galvanised steel	6 PCS / 15 BUN
109899	275.00	Galvanised steel	6 PCS / 15 BUN
109900	300.00	Galvanised steel	6 PCS / 15 BUN
109901	325.00	Galvanised steel	6 PCS / 15 BUN
109902	350.00	Galvanised steel	6 PCS / 15 BUN
109903	375.00	Galvanised steel	6 PCS / 15 BUN
109904	400.00	Galvanised steel	6 PCS / 15 BUN
109906	450.00	Galvanised steel	6 PCS / 15 BUN
109907	500.00	Galvanised steel	6 PCS / 15 BUN
113734	600.00	Galvanised steel	6 PCS / 15 BUN

PRODUCT DATA SHEET

U Reinforcing profile

UA 50-40-20

Item no. 5129



This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!