


PRODUCT DATA SHEET

U Reinforcing profile
U 75-40-20
Item no. 5130



Status: 31.07.2026 | 21:10

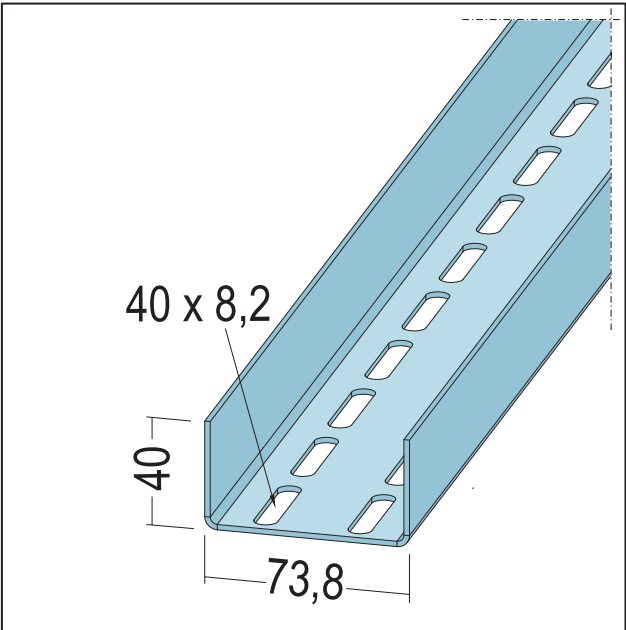

Designation	U Reinforcing profile U 75-40-20
Description	Application area: walls/wall faces, especially in door areas, or support profiles for free-spanning ceilings.
Product area	Dry lining Lightweight steel construction
Product category	Stand profiles for ceiling and wall Long-Span Beams – ediBeam
Material thickness	2 mm
Standard EN	EN 14195:2005/AC:2006
Standard	DIN18182-1
Galvanizing	tested to standard
Product width	73,8 mm
Reaction to fire (R2F)	A1
Customs tariff number	73089059
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
109908	250.00	Galvanised steel	4 PCS / 25 BUN
109909	260.00	Galvanised steel	4 PCS / 25 BUN
109910	275.00	Galvanised steel	4 PCS / 25 BUN
109911	300.00	Galvanised steel	4 PCS / 25 BUN
109912	325.00	Galvanised steel	4 PCS / 25 BUN
109913	350.00	Galvanised steel	4 PCS / 25 BUN
109914	375.00	Galvanised steel	4 PCS / 25 BUN
109915	400.00	Galvanised steel	4 PCS / 25 BUN
109917	450.00	Galvanised steel	4 PCS / 25 BUN
109919	500.00	Galvanised steel	4 PCS / 25 BUN
109921	600.00	Galvanised steel	4 PCS / 25 BUN

PRODUCT DATA SHEET

U Reinforcing profile

U 75-40-20

Item no. 5130



This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!