


PRODUCT DATA SHEET

U Reinforcing profile unperforated
UA 75-20
Item no. 5150



Status: 31.07.2026 | 21:02

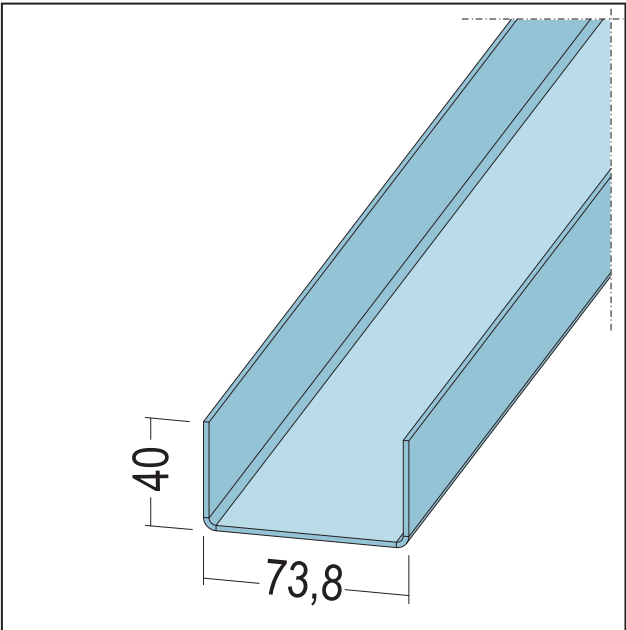

Designation	U Reinforcing profile unperforated UA 75-20
Description	Application area: walls/wall faces, especially in door areas, or support profiles for free-hanging ceilings.
Product area	Dry lining
Product category	Stand profiles for ceiling and wall
Material thickness	2 mm
Standard EN	EN 14195:2005/AC:2006
Standard	DIN18182-1
Test Standard EN	EN 13964
Test Standard DIN	DIN 18168-2
Galvanizing	tested to standard
Product width	73,8 mm
Reaction to fire (R2F)	A1
Customs tariff number	73089059
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
112387	300.00	Galvanised steel	4 PCS / 25 BUN
112388	400.00	Galvanised steel	4 PCS / 25 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!