


PRODUCT DATA SHEET

U-connecting profile
for UA 50
Item no. 5512



Status: 01.08.2026 | 21:40

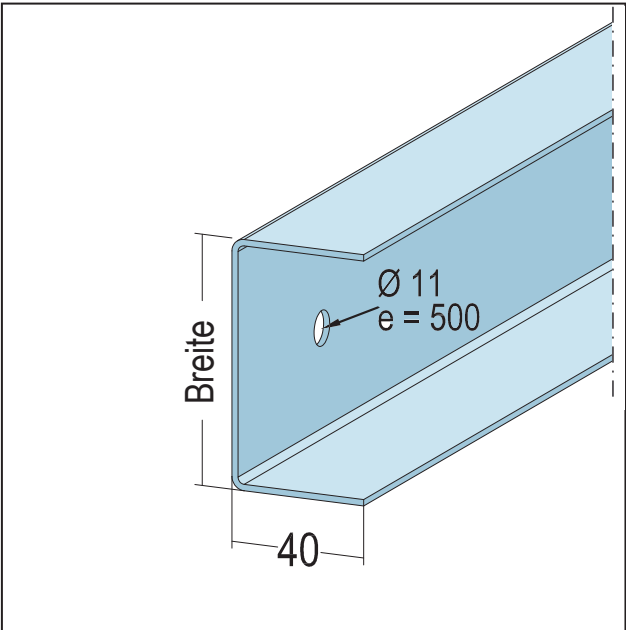

Designation	U-connecting profile for UA 50
Description	Application area: connection profile for UA profiles on free-spanning ceilings.
Product area	Dry lining Lightweight steel construction
Product category	Stand profiles for ceiling and wall Long-Span Beams – ediBeam
Material thickness	2 mm
Standard EN	EN 14195:2005/AC:2006
Standard	DIN18182-1
Galvanizing	tested to standard
Product width	52,8 mm
Reaction to fire (R2F)	A1
Customs tariff number	73089059
Opened label	Purchase also possible as a single item:

Item number	Length (cm)	Material	Packaging unit
115983	400.00	S320 GD+Z	1 PCS / 198 PCS

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!