

# PRODUCT DATA SHEET


U connection profile bendable

UD 28

Item no. 5552



Status: 06.12.2024 | 11:12

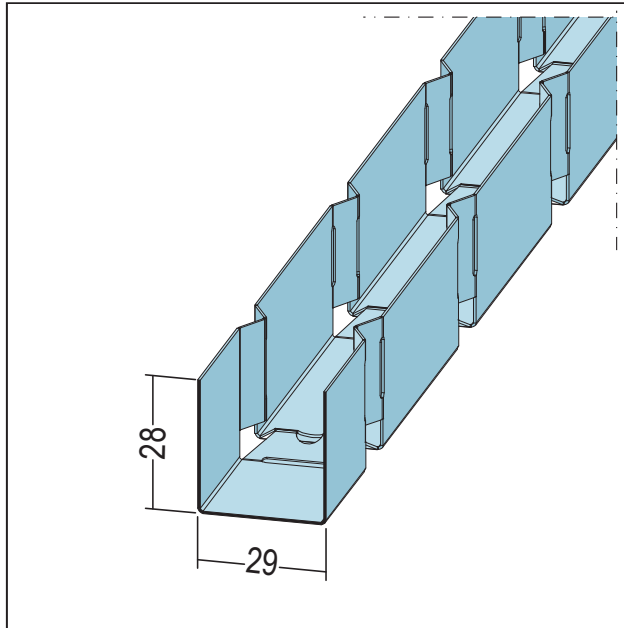

<b>Designation</b>	U connection profile bendable UD 28
<b>Description</b>	Application area: for curved ceiling constructions. Profiles must be bent on site.  Minimum bending radius 110 mm. The specifications of the manufacturer of the boards must be observed.
<b>Product area</b>	Dry lining / lightweight steel construction
<b>Product category</b>	Formable profiles flexibilo
<b>Material</b>	Galvanised steel
<b>Material thickness</b>	0,6 mm
<b>Standard EN</b>	EN 14195:2005
<b>Standard</b>	EN 13964
<b>Galvanizing</b>	Z 140
<b>Product length</b>	300 cm
<b>Product width</b>	29 mm
<b>Product height in mm</b>	30 mm
<b>Reaction to fire (R2F)</b>	A1
<b>Packaging Unit</b>	8 PCS / 25 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!