


PRODUCT DATA SHEET

U-wall profile bendable
UW 75-06
Item no. 5555



Status: 02.08.2026 | 00:24

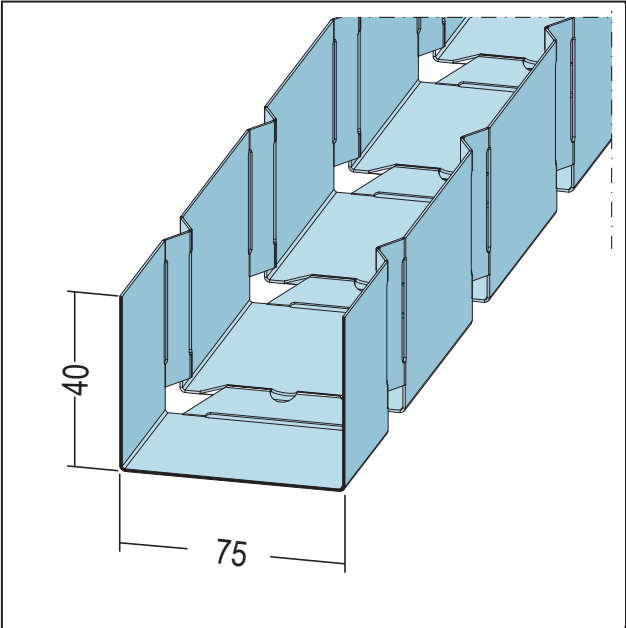

Designation	U-wall profile bendable UW 75-06
Description	Application area: for curved wall constructions. Profiles must be bent on site. Minimum bending radius 300 mm. The specifications of the manufacturer of the boards must be observed.
Product area	Dry lining
Product category	Formable profiles flexibilo
Material thickness	0,6 mm
Standard EN	EN 14195:2005/AC:2006
Standard	EN 13964
Galvanizing	Z 140
Product width	75 mm
Product height in mm	40 mm
Reaction to fire (R2F)	A1
Customs tariff number	72166190
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
117002	300.00	Galvanised steel	8 PCS / 20 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!