


PRODUCT DATA SHEET

Adjustable direct hanging acoustically insulated for C 60-27
69 - 118 mm
Item no. 56310



Status: 01.08.2026 | 21:26

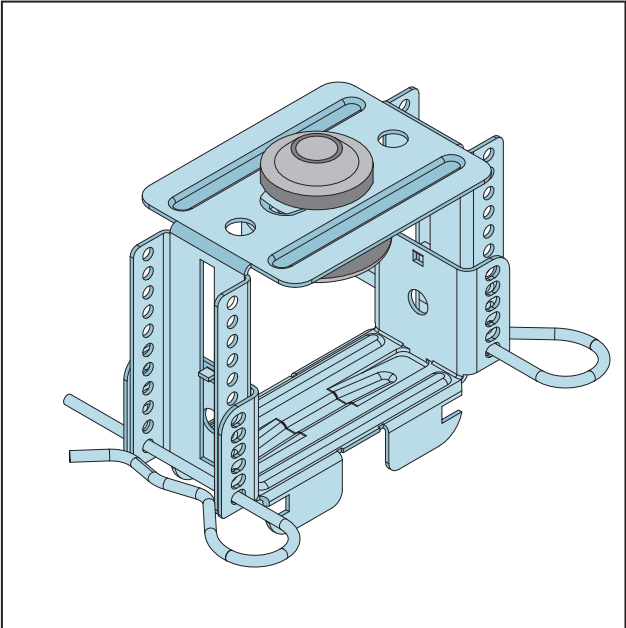

Designation	Adjustable direct hanging acoustically insulated for C 60-27 69 - 118 mm
Description	For attaching CD profiles on hanging ceiling sub-structures to improve sound insulation. 2-pieces, includes safety clamps. Use washers for wooden beam screw joints.
Product area	Dry lining
Product category	Sound Insulation silencio
Material thickness	1 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Capacity class	0,40 kN
Reaction to fire (R2F)	A1
Load bearing capacity	400 N
Customs tariff number	73089059
Processing instructions	Use washers for wooden beam screw joint.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
115611	0.00	Galvanised steel	50 PCE / 32 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!