


PRODUCT DATA SHEET

Adjusting strip for Nonius hanger acoustically insulated
590 mm
Item no. 56325



Status: 31.07.2026 | 20:11

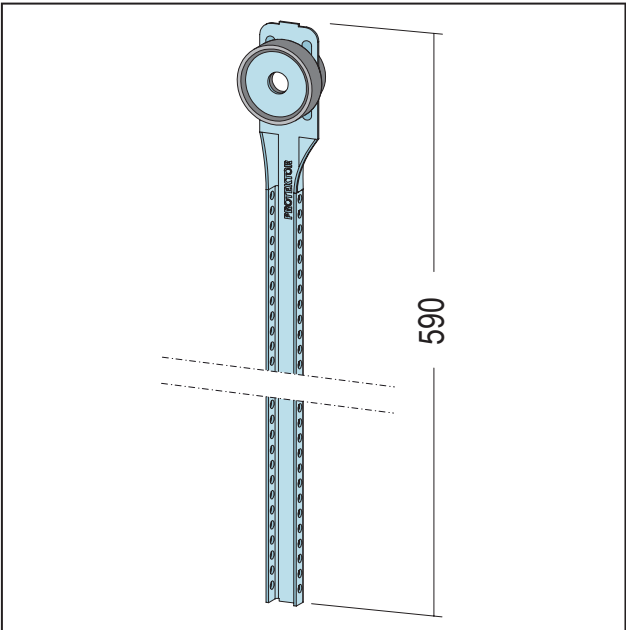

Designation	Adjusting strip for Nonius hanger acoustically insulated 590 mm
Description	Application area: ceiling sub-constructions connected to vernier subdividers for improving wall facings.
Product area	Dry lining
Product category	Sound Insulation silencio
Standard EN	EN 13964:2014
Test Standard DIN	DIN 18168-2
Galvanizing	tested to standard
Capacity class	k.A.
Treatment	- Attach the Nonius upper part at the required centre distance using suitable fasteners. - Connect the Nonius lower part with two safety clamps or a safety clip. - After aligning the substructure, secure the securing bracket by bending it over.
Load bearing capacity	NPD*
Customs tariff number	73089059
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
109850	59.00	Galvanised steel	100 PCE / 12 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!