


PRODUCT DATA SHEET

Profile connector C3-C5M universal+
for C 60-27
Item no. 58103



Status: 31.07.2026 | 20:01

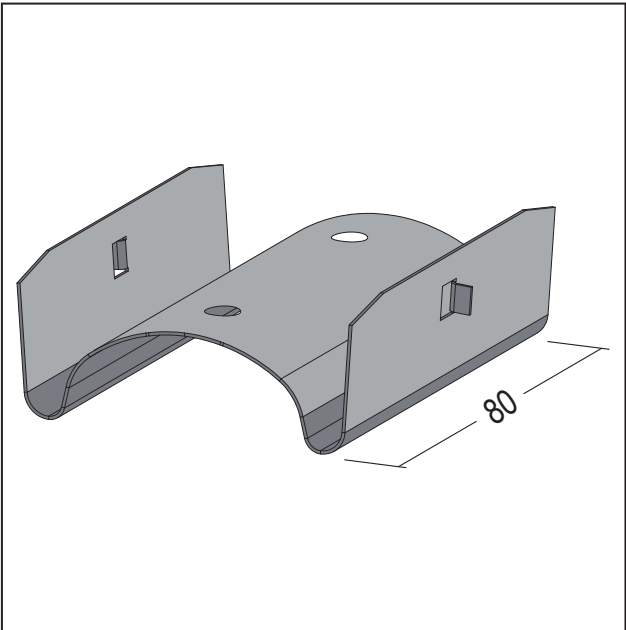

Designation	Profile connector C3-C5M universal+ for C 60-27
Description	For laterally connecting CD 60-27 profiles with increased corrosion resistance requirements.
Product area	Dry lining
Product category	Anti corrosion defendo
Material thickness	0,5 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Standard coating profile	DIN 18219:2024
Reaction to fire (R2F)	A2-s1, d0
Treatment	- Push the longitudinal connector into the first ceiling profile as far as it will go and then push the second profile on as far as it will go.
Load bearing capacity	710 N
Customs tariff number	73089059
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
109448	8.00	Galvanised steel with coating	100 PCE / 45 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!