


# PRODUCT DATA SHEET

Nonius hanger C3-C5M universal+  
for C 60-27  
Item no. 58108



Status: 31.07.2026 | 19:55

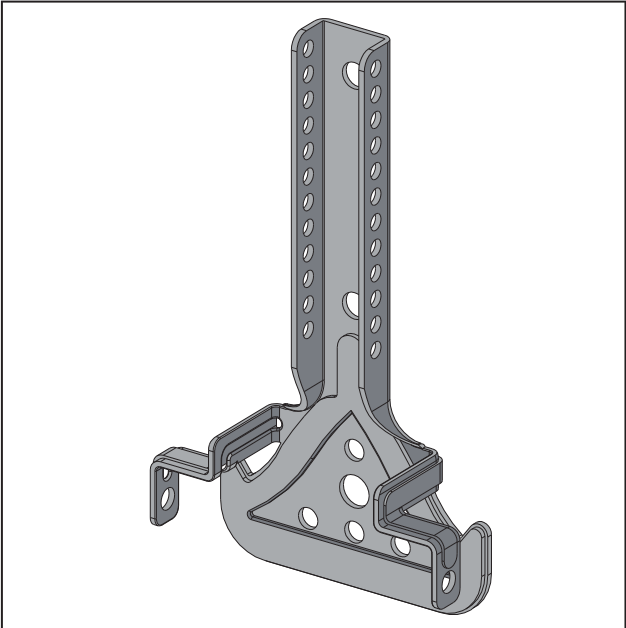

|                          |                                                                                                                                                                                                                                                                                       |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Designation              | Nonius hanger C3-C5M universal+ for C 60-27                                                                                                                                                                                                                                           |
| Description              | For attaching CD profiles on ceiling sub-constructions with vernier suspensions increased corrosion resistance.<br>For external and internal ceilings with a suspension height of up to 500 mm.                                                                                       |
| Product area             | Dry lining                                                                                                                                                                                                                                                                            |
| Product category         | Anti corrosion defendo                                                                                                                                                                                                                                                                |
| Material thickness       | 1,2 mm                                                                                                                                                                                                                                                                                |
| Standard EN              | EN 13964:2014                                                                                                                                                                                                                                                                         |
| Standard                 | DIN18168-2                                                                                                                                                                                                                                                                            |
| Galvanizing              | tested to standard                                                                                                                                                                                                                                                                    |
| Standard coating profile | DIN 18219:2024                                                                                                                                                                                                                                                                        |
| Capacity class           | 0,40 kN                                                                                                                                                                                                                                                                               |
| Reaction to fire (R2F)   | A2-s1, d0                                                                                                                                                                                                                                                                             |
| Treatment                | - Set the lower part of the Nonius into the profile - The lower part of the Nonius is connected to the upper part of the Nonius by means of two safety clamps or a safety clip. - Readjust if necessary - After aligning the substructure, secure the safety clip by bending it over. |
| Load bearing capacity    | 610 N                                                                                                                                                                                                                                                                                 |
| Customs tariff number    | 73089059                                                                                                                                                                                                                                                                              |
| Processing instructions  | See processing description.                                                                                                                                                                                                                                                           |
| Opened label             | Purchase only possible as full packaging units.                                                                                                                                                                                                                                       |

| Item number | Length (cm) | Material                      | Packaging unit   |
|-------------|-------------|-------------------------------|------------------|
| 109452      | 12.00       | Galvanised steel with coating | 100 PCE / 51 BOX |

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

# PRODUCT DATA SHEET

Nonius hanger C3-C5M universal+  
for C 60-27  
Item no. 58108



All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!