


PRODUCT DATA SHEET

U-hanger flat for C 60-27 C3-C5M universal+
200 mm
Item no. 58159



Status: 01.09.2026 | 20:39

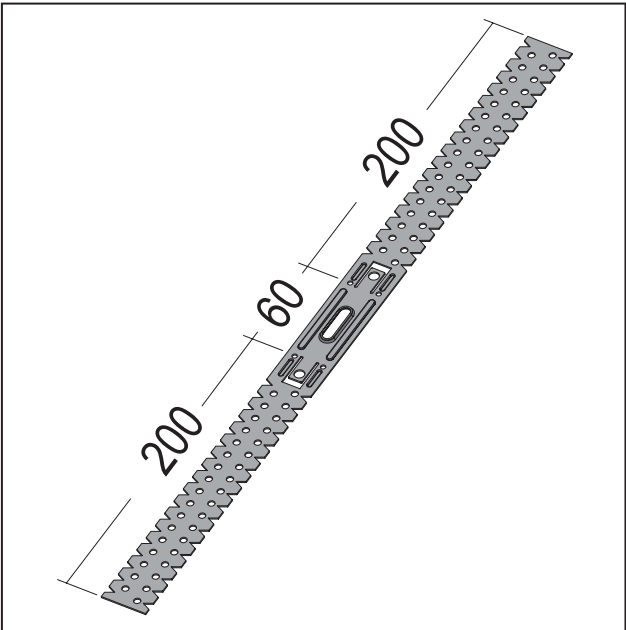

Designation	U-hanger flat for C 60-27 C3-C5M universal+ 200 mm
Description	For attaching CD profiles on hanging ceiling sub-constructions with increased corrosion resistance requirements.
Product area	Dry lining
Product category	Anti corrosion defendo
Material thickness	0,9 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Product width	60 mm
Standard coating profile	DIN 18219:2024
Capacity class	0,40 kN
Reaction to fire (R2F)	A2-s1, d0
Treatment	- Attach the direct hanger with suitable fasteners at the required centre distance. Centrally or on the side lugs. - Adjust the ceiling support profile to the required slope height and fix it to the side brackets with flat-head sheet metal screws. - Bend over protruding tabs
Load bearing capacity	0,400 kN
Customs tariff number	73089059
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
115165	0.00	Galvanised steel, with C3-C5-surface coating	100 PCE / 16 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

PRODUCT DATA SHEET

U-hanger flat for C 60-27 C3-C5M universal+
200 mm
Item no. 58159



All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!