


PRODUCT DATA SHEET

Dry wall screw C3-C5 universal
TN 3,5 x 25 mm
Item no. 58205



Status: 31.07.2026 | 19:25

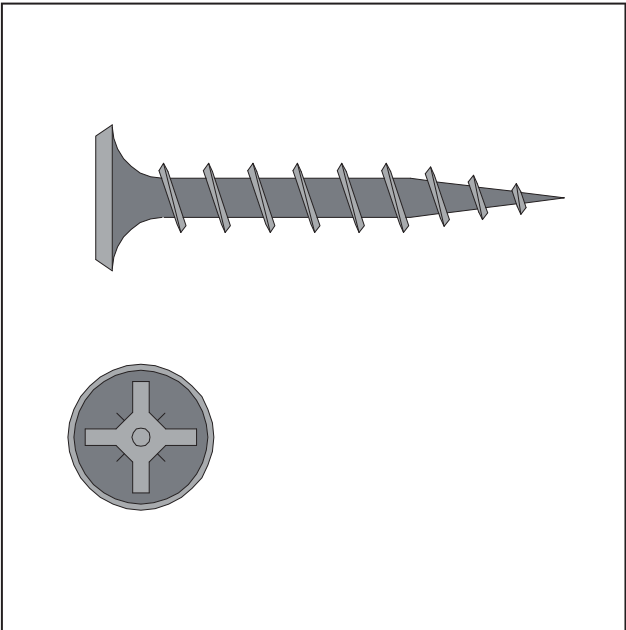

Designation	Dry wall screw C3-C5 universal TN 3,5 x 25 mm
Description	For connecting panelling materials for sheet metal thicknesses of up to 0.7 mm with double lead thread with increased corrosion resistance requirements.
Product area	Dry lining
Product category	Anti corrosion defendo
Standard EN	EN 14566
Standard	DIN18182-2
Galvanizing	tested to standard
Standard coating profile	DIN EN ISO 12944
Reaction to fire (R2F)	A1
Customs tariff number	73181558
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
112467	0.00	Galvanised steel with coating	1.000 PCE / 384 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!