


PRODUCT DATA SHEET

Quick cross-connector flat C3-C5M universal+
for U 50 to C 60-27
Item no. 58304



Status: 31.07.2026 | 13:46

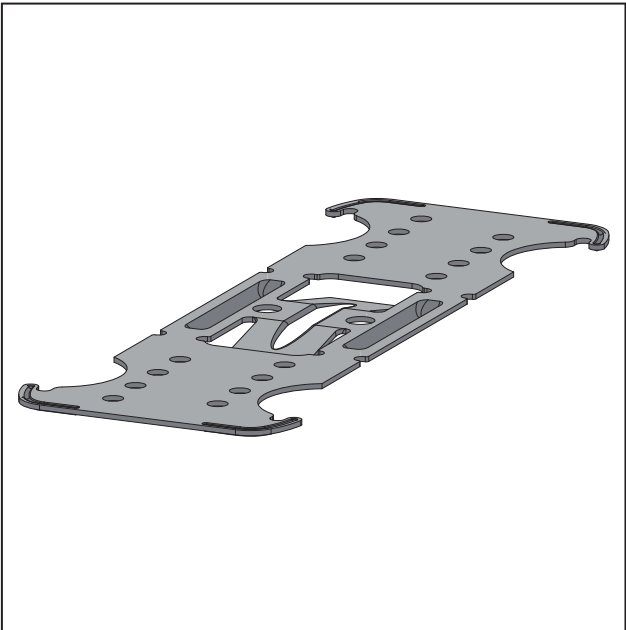

Designation	Quick cross-connector flat C3-C5M universal+ for U 50 to C 60-27
Description	For creating cross connections from UA-50 to CD 60-27 profiles on hanging ceiling sub- constructions with increased corrosion resistance requirements.
Product area	Dry lining
Product category	Anti corrosion defendo
Material thickness	0,9 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Standard coating profile	DIN 18219:2024
Capacity class	0,40 kN
Reaction to fire (R2F)	A2-s1, d0
Treatment	- Bend the side legs to the middle part by 90 degrees. - Slide over the UA-50 profile at a slight angle and hook the lateral legs into the support profile. - To click in the legs on the other side, press on the middle section from above until you hear them snap in. - After the installation, the profiles can still be moved.
Customs tariff number	73089059
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
110179	0.00	Galvanised steel with coating	100 PCE / 45 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!